


### Overview

#### HP 280 G3 Small Form Factor Business PC

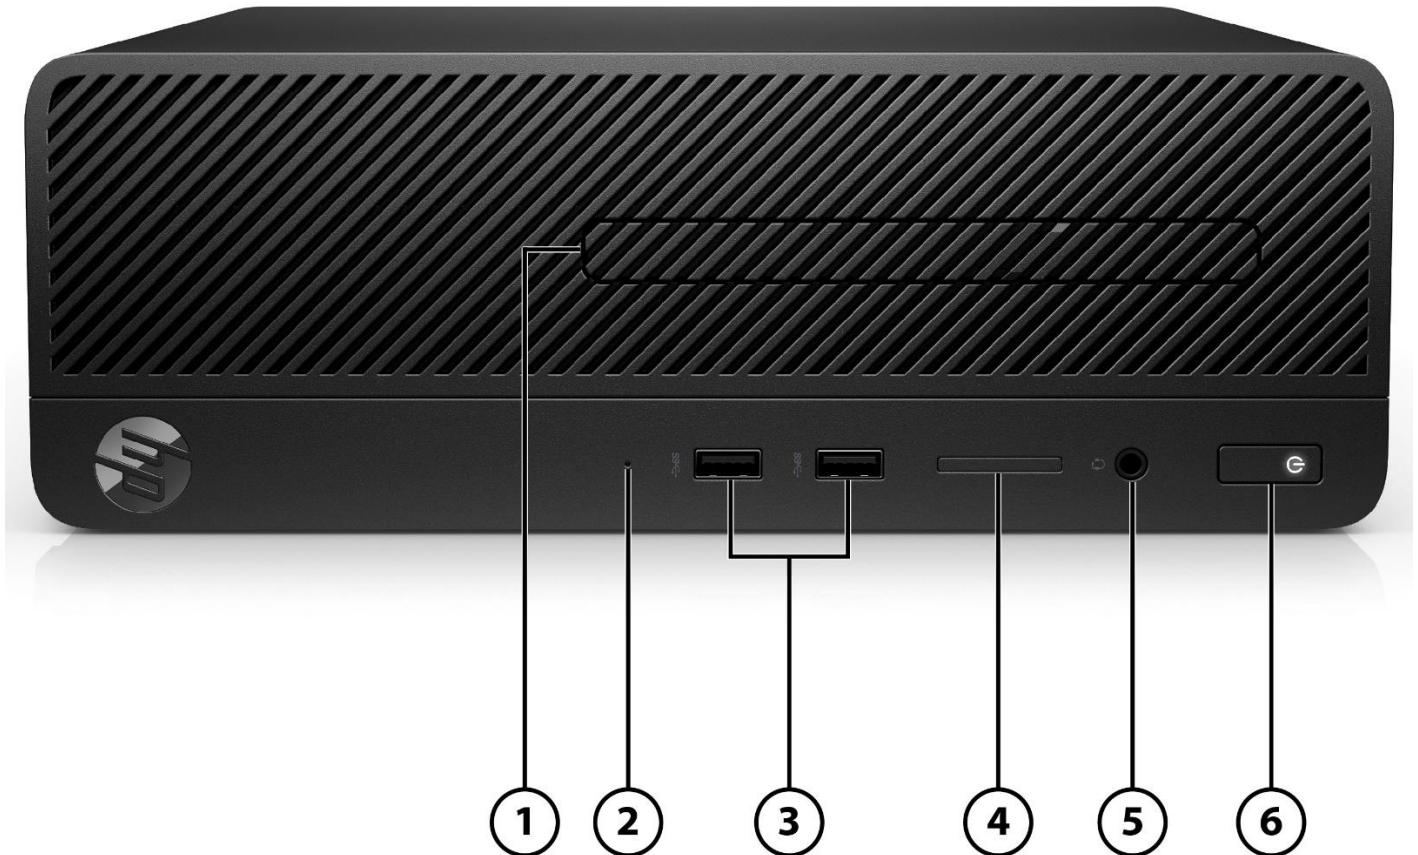

#### **Front**


1. Slim-height Bay - supporting an optical disk drive (optional)
2. HDD LED light
3. (2) USB 3.1 Gen 1 Ports
4. SD Media Card Reader
5. Microphone/Headphone Combo Jack
6. Power Button

#### **Not Shown**

- Slots
- (1) PCI Express x16
  - (1) PCI Express x1
  - (1) M.2 for WLAN
  - (1) M.2 2242/2280 storage
- Bays
- (1) 3.5" or 2.5" internal storage
  - (1) Slim-height bay

### Overview

### HP 280 G3 Small Form Factor Business PC

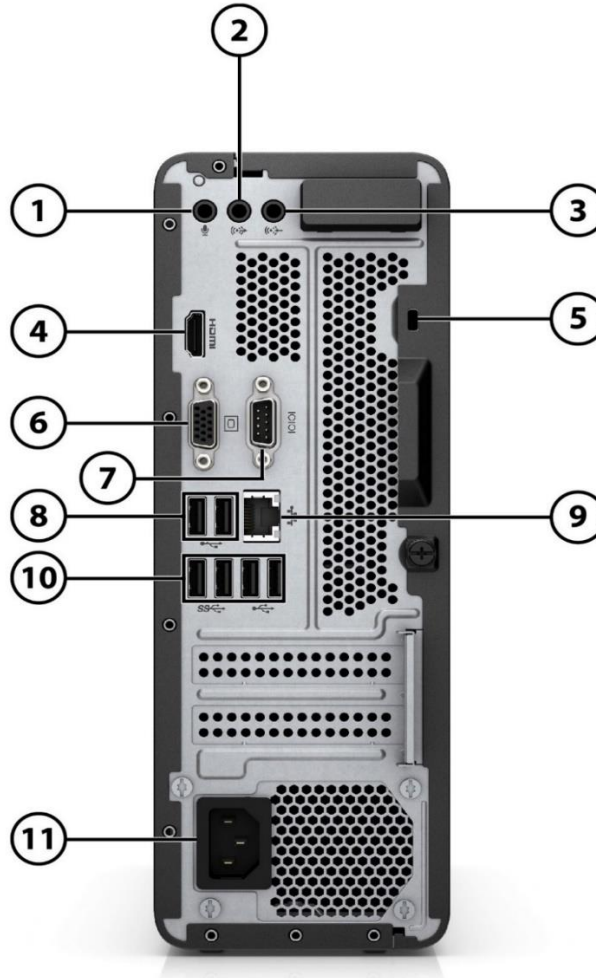

#### **Back**

1. Audio Mic in
2. Audio Line out
3. Audio Link in
4. HDMI Port<sup>1</sup>
5. Standard security lock slot
6. VGA Port<sup>1</sup>
7. Serial Port
8. (2) USB 2.0 port
9. RJ-45 Network Connector
10. (2) USB 3.1 Gen1 Port (left) and (2) USB 2.0 port (right)
11. Power Cord Connector

#### **Not Shown**

- Optional Parallel Port (Optional via PCIe slot)
- Optional 4 Serial Port (Optional via PCIe slot)

1. Port will be covered up when discrete graphic card is configured on shipped machine

### AT A GLANCE



### Standard Features and Configurable Modules

#### AT A GLANCE

- Windows® 10 Pro, Windows® 10 Home or FreeDos
- Intel® H370 chipset supporting Intel® 8th and 9th generation processors, featuring Intel® UHD Graphics
- Supports an optional discrete graphics card
- Integrated 10/100/1000 Ethernet Controller or 802.11a/b/g/n/ac (1x1) WiFi® and Bluetooth® 4.2 Combo
- Up to 32GB DDR4-2666 Unbuffered Memory (UDIMM)
- Independent monitor support via VGA and HDMI interfaces
- TPM 2.0 support (firmware)\*
- Supports both Hard Disk Drives and SATA TLC / M.2 PCIe NVMe Solid State Drives
- Audio in, Audio out and Mic in support 5.1 channel
- 8 USB Ports (including 4 USB 3.1 Gen1 ports)
- 180W Full range 115V/230V
- Security cable lock supported (sold separately)
- ENERGY STAR® certified. EPEAT® 2019 registered where applicable. EPEAT® registration varies by country. See [www.epeat.net](http://www.epeat.net) for registration status by country.\*
- Protected by HP Services; terms and conditions vary by country; certain restrictions and exclusions apply
- Dust filter available

1. TPM feature will not be supported on machine pre-configured with FreeDOS, In some cases, machines pre-configured with Windows OS might ship with TPM turned off

\*Based on US EPEAT® registration according to IEEE 1680.1-2018 EPEAT®. Status varies by country. Visit <http://www.epeat.net> for more information.

**NOTE: See important legal disclosures for all listed specs in their respective features sections.**

### Standard Features and Configurable Modules

#### OPERATING SYSTEMS

##### Preinstalled (Windows)

Windows 10 Pro 64<sup>1</sup>  
Windows 10 Home 64<sup>1</sup>

##### Pre-installed (Other)

FreeDOS 2.0

1. Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows 10 is automatically updated, which is always enabled. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.microsoft.com>.

#### PROCESSORS

##### Intel® Celeron® Processors<sup>2,3</sup>

CPU Intel Celeron G4900 Dual Core 3.1GHz 2400MHz 54W (3.1 GHz, 2 MB cache, 2 cores)  
CPU Intel Celeron G4930 Dual Core 3.2GHz 2400MHz 54W (3.2GHz, 2 MB cache, 2 cores)

##### Intel® Pentium®<sup>2,3</sup>

CPU Intel Pentium G5400 Dual Core 3.7GHz 2400MHz 54W (3.7 GHz, 4 MB cache, 2 cores)  
CPU Intel Pentium G5420 Dual Core 3.8GHz 2400MHz 54W (3.8 GHz, 4 MB cache, 2 cores)  
CPU Intel Pentium G5500 Dual Core 3.8GHz 2400MHz 54W (3.8 GHz, 4 MB cache, 2 cores)  
CPU Intel Pentium G5600 Dual Core 3.9GHz 2400MHz 54W (3.9 GHz, 4 MB cache, 2 cores)  
CPU Intel Pentium G5620 Dual Core 3.8GHz 2400MHz 54W (3.8GHz, 4 MB cache, 2 cores)

##### Intel 8<sup>th</sup> Processors

###### Intel® Core™ i3<sup>2,3</sup>

CPU Intel Core i3-8100 Quad Core 3.6GHz 2400MHz 65W (3.6 GHz, 6 MB cache, 4 cores)

###### Intel® Core™ i5<sup>2,3</sup>

CPU Intel Core i5-8400 6C 2.8GHz 2666MHz 65W (2.8GHz, turbo up to 4GHz, 9 MB cache, 6 cores)

###### Intel® Core™ i5<sup>2,3</sup>

CPU Intel Core i5-8500 6C 3.0GHz 2666MHz 65W (3GHz, turbo up to 4.1GHz, 9 MB cache, 6 cores)

###### Intel® Core™ i7<sup>2,3</sup>

CPU Intel Core i7-8700 6C 3.2GHz 2666MHz 65W (3.2GHz, turbo up to 4.6GHz, 12 MB cache, 6 cores)

##### Intel 9<sup>th</sup> Processors

###### Intel® Core™ i3<sup>2,3</sup>

CPU Intel Core i3-9100 4C 3.6GHz 2400MHz 65W (3.6GHz, turbo up to 4.2GHz, 6 MB cache, 4 cores)  
CPU Intel Core i3-9300 4C 3.7GHz 2400MHz 62W (3.7GHz, turbo up to 4.3GHz, 8 MB cache, 4 cores)

###### Intel® Core™ i5<sup>2,3</sup>

CPU Intel Core i5-9400 6C 2.9GHz 2666MHz 65W (2.9GHz, turbo up to 4.1GHz, 9 MB cache, 6 cores)\*  
CPU Intel Core i5-9400F 6C 2.9GHz 2666MHz 65W (2.9GHz, turbo up to 4.1GHz, 9 MB cache, 6 cores)  
CPU Intel Core i5-9500 6C 3GHz 2666MHz 65W (3GHz, turbo up to 4.4GHz, 9 MB cache, 6 cores)  
CPU Intel Core i5-9500F 6C 3GHz 2666MHz 65W (3GHz, turbo up to 4.4GHz, 9 MB cache, 6 cores)  
CPU Intel Core i5-9600 6C 3.1GHz 2666MHz 65W (3.1GHz, turbo up to 4.6GHz, 9 MB cache, 6 cores)

### Standard Features and Configurable Modules

#### Intel® Core™ i7<sup>2,3</sup>

CPU Intel Core i7-9700 8C 3GHz 2666MHz 65W (3GHz, turbo up to 4.7GHz, 12 MB cache, 8 cores)

2. Your product does not support Windows 8 or Windows 7. In accordance with Microsoft's support policy, HP does not support the Windows® 8 or Windows 7 operating system on products configured with Intel 8th generation and forward processors or provide any Windows® 8 or Windows 7 drivers on <http://www.support.hp.com>

3. Multicore is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. Intel's numbering, branding and/or naming is not a measurement of higher performance.

**\*NOTE:** Only available on selected region

### CHIPSET

Intel® H370 Chipset

### GRAPHICS

#### Integrated<sup>4,5</sup>

Intel® UHD

Graphics 630 (integrated on 8<sup>th</sup> Core i7/i5/i3 processors and 9<sup>th</sup> i5 processors)

Intel® UHD

Graphics 610 (integrated on 8<sup>th</sup> and 9<sup>th</sup> Pentium and Celeron)

#### Discrete Graphics

AMD Radeon™ R7 430 2GB PCIe x16 GFX

NVIDIA® GeForce® GT730 1GB GFX

NVIDIA® GeForce® GT730 2GB GFX

4. HD content required to view HD images.

5. Integrated Intel software is available on select models only and requires separately purchased projector, tv or computer monitor with an integrated or external receiver. External receivers connect to the projector, tv or computer monitor via a standardVGA,HDMI cable, also sold separately.

### MEMORY

Both slots are customer accessible / upgradeable, Supports Dual Channel Memory

Form Factor	Type	Maximum	# of Slots
Small Form Factor	DDR4 2666 (Transfer rates up to 2666 MT/s)	32 GB capacity	2 DIMM <sup>6</sup>
	4 GB DDR4-2666 UDIMM (1x4GB)		
	8 GB DDR4-2666 UDIMM (1x8GB)		
	8 GB DDR4-2666 UDIMM (2x4GB)		
	16 GB DDR4-2666 UDIMM (1x16GB)		
	16 GB DDR4-2666 UDIMM (2x8GB)		

6. Memory modules support data transfer rates up to 2666 MT/s; actual data rate is determined by the system's configured processor. See processor specifications for supported memory data rate.

### Standard Features and Configurable Modules

#### STORAGE AND DRIVES

##### SATA3 - 3.5" or 2.5" 6Gb/s HDDs\*

2TB 7200 RPM SATA Hard Disk Drive

1TB 7200 RPM SATA Hard Disk Drive

500GB 7200 RPM SATA Hard Disk Drive

128GB 2.5" TLC SSD

256GB 2.5" TLC SSD

##### M.2 Solid State Drives <sup>7</sup>

128GB M.2 NVMe

256GB M.2 NVMe

512GB M.2 NVMe

##### SD Card Reader<sup>8</sup>

SD/SDHC/SDXC SD Card Reader

7. For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36 GB (for Windows 10) of system disk is reserved for the system recovery software.

8. Card sold separately.

---

#### OPTICAL DISC DRIVES

DVD-ROM 9.5mm<sup>9</sup>

DVD-Writer 9.5mm<sup>9</sup>

9. Optical drives are optional or add on features. Duplication of copyrighted material is strictly prohibited. Actual speeds may vary. Double Layer media compatibility will widely vary with some home DVD players and DVD-ROM drives.

---

#### NETWORKING/COMMUNICATIONS

##### Networking

Integrated 10/100/1000M GbE LAN

##### Wi-Fi and Bluetooth<sup>®10</sup>

802.11a/b/g/n/ac (1x1) WiFi and Bluetooth<sup>®</sup> 4.2 Combo

10. Wireless cards are optional or add-on features and requires separately purchased wireless access point and internet service. Availability of public wireless access points limited.

---

#### AUDIO/MULTIMEDIA

Integrated Hi-Definition Audio

Combo Jack, Headphone/ Microphone

### Standard Features and Configurable Modules

Line-in/ Line-out/ Mic-in jacks(3.5mm)

---

### KEYBOARDS/POINTING DEVICES/BUTTONS AND FUNCTIONS KEYS

#### Keyboard

USB Business Slim Wired Keyboard

HP USB Keyboard

Business Slim USB Antimicrobial Wired Keyboard (China)

No KB Option

#### Mouse

Antimicrobial USB Mouse (China)

HP Optical USB Mouse

Universal Wired Mouse USB

USB Hardened Mouse (India)

No Mouse Option

---

### PORTS

#### Front

Slim-height Bay - supporting an optical disk drive (optional)

HDD LED light

(2) USB 3.1 Gen 1 Ports

SD Media Card Reader

Microphone/Headphone Combo Jack

Power Button

#### Not Shown

Slots (1) PCI Express x16

(1) PCI Express x1

(1) M.2 for WLAN

(1) M.2 2242/2280 storage

#### Rear

Audio Mic in

Audio Line out

Audio Link in

HDMI Port<sup>1</sup>

Standard lock slot

VGA Port<sup>1</sup>

Serial Port

(2) USB 2.0 port

RJ-45 Network Connector

### Standard Features and Configurable Modules

(2) USB 3.1 Gen1 Port and (2) USB 2.0 port  
Power Cord Connector

#### Not Shown

Optional Parallel Port (Optional via PCIe1 slot)

- Port will be covered up when discrete graphic card is configured on shipped machine

### BAYS

(1) 3.5" or 2.5" internal storage  
(1) Slim-height bay

### ENVIRONMENTAL & INDUSTRY

<b>Environmental Data</b>	<b>Eco-Label Certifications &amp; declarations</b>	<p>This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:</p> <ul style="list-style-type: none"> <li>• IT ECO declaration</li> <li>• US ENERGY STAR®</li> <li>• EPEAT® 2019 registered where applicable. EPEAT® registration varies by country. See <a href="http://www.epeat.net">http://www.epeat.net</a> for registration status by country. Search keyword generator on HP's 3rd party option store for solar generator accessories at <a href="http://www.hp.com/go/options">http://www.hp.com/go/options</a>.</li> </ul> <p>*Based on US EPEAT® registration according to IEEE 1680.1-2018 EPEAT®. Status varies by country. Visit <a href="http://www.epeat.net">http://www.epeat.net</a> for more information.</p>		
	<b>System Configuration</b>	The configuration used for the Energy Consumption and Declared Noise Emissions data for the Desktop model is based on a "Typically Configured Desktop".		
	<b>Energy Consumption (in accordance with US ENERGY STAR® test method)</b>	<b>115VAC, 60Hz</b>	<b>230VAC, 50Hz</b>	<b>100VAC, 60Hz</b>
	Normal Operation (Short idle)	10.93	11.16	10.96
	Normal Operation (Long idle)	10.39	10.37	10.18
	Sleep	0.65	0.68	0.65
	Off	0.36	0.39	0.37
		<p>Note: Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.</p>		
	<b>Heat Dissipation*</b>	<b>115VAC, 60Hz</b>	<b>230VAC, 50Hz</b>	<b>100VAC, 60Hz</b>
	Normal Operation (Short idle)	37.27	38.06	37.37
Normal Operation (Long idle)	35.43	35.36	34.71	



### Standard Features and Configurable Modules

	Sleep	2.22	2.32	2.22
	Off	1.23	1.33	1.26
	*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.			
	<b>Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)</b>	Sound Power (L <sub>WAd</sub> , bels)	Sound Pressure (L <sub>pAm</sub> , decibels)	
	Typically Configured – Idle	3.3	26	
	Fixed Disk – Random writes	3.4	26.1	
	<b>Longevity and Upgrading</b>	This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:  Spare parts are available throughout the warranty period and or for up to “5” years after the end of production.		
	<b>Batteries</b>	This battery(s) in this product comply with EU Directive 2006/66/EC  Batteries used in the product do not contain: Mercury greater the 1ppm by weight Cadmium greater than 20ppm by weight  Battery size: CR2032 (coin cell) Battery type: Lithium		
	<b>Additional Information</b>	<ul style="list-style-type: none"> <li>• This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC.</li> <li>• This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.</li> <li>• This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).</li> <li>• This product is in compliance with the IEEE 1680.1-2018 EPEAT®. Status varies by country. Visit <a href="http://www.epeat.net">www.epeat.net</a> for more information.</li> <li>• Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043.</li> <li>• This product contains 0% post-consumer recycled plastic (by wt.)</li> <li>• This product is 94.4% recycle-able when properly disposed of at end of life.</li> </ul>		
	<b>Packaging Materials</b>	<b>External:</b>	PAPER/Corrugated	
		<b>Internal:</b>	PLASTIC/EPE (Expanded Polyethylene)	
			PLASTIC/Polyethylene low density - LDPE	
			Paper/Molded pulp	
		The plastic packaging material contains at least 50% recycled content.		
		The corrugated paper packaging materials contains at least 75% recycled content.		
	<b>Material Usage</b>	This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf">http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf</a> ):		
		<ul style="list-style-type: none"> <li>• Asbestos</li> <li>• Certain Azo Colorants</li> </ul>		

### Standard Features and Configurable Modules

		<ul style="list-style-type: none"> <li>• Certain Brominated Flame Retardants – may not be used as flame retardants in plastics</li> <li>• Cadmium</li> <li>• Chlorinated Hydrocarbons</li> <li>• Chlorinated Paraffins</li> <li>• Formaldehyde</li> <li>• Halogenated Diphenyl Methanes</li> <li>• Lead carbonates and sulfates</li> <li>• Lead and Lead compounds</li> <li>• Mercuric Oxide Batteries</li> <li>• Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.</li> <li>• Ozone Depleting Substances</li> <li>• Polybrominated Biphenyls (PBBs)</li> <li>• Polybrominated Biphenyl Ethers (PBBEs)</li> <li>• Polybrominated Biphenyl Oxides (PBBOs)</li> <li>• Polychlorinated Biphenyl (PCB)</li> <li>• Polychlorinated Terphenyls (PCT)</li> <li>• Polyvinyl Chloride (PVC) – except for wires and cables, has been voluntarily removed from most applications.</li> <li>• Radioactive Substances</li> <li>• Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)</li> </ul>
	<p><b>Packaging Usage</b></p>	<p>HP follows these guidelines to decrease the environmental impact of product packaging:</p> <ul style="list-style-type: none"> <li>• Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.</li> <li>• Eliminate the use of ozone-depleting substances (ODS) in packaging materials.</li> <li>• Design packaging materials for ease of disassembly.</li> <li>• Maximize the use of post-consumer recycled content materials in packaging materials.</li> <li>• Use readily recyclable packaging materials such as paper and corrugated materials.</li> <li>• Reduce size and weight of packages to improve transportation fuel efficiency.</li> <li>• Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.</li> </ul>
	<p><b>End-of-life Management and Recycling</b></p>	<p>Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <a href="http://www.hp.com/go/reuse-recycle">http://www.hp.com/go/reuse-recycle</a> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.</p> <p>The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <a href="http://www.hp.com/go/recyclers">http://www.hp.com/go/recyclers</a>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.</p>

### Standard Features and Configurable Modules

	<b>HP, Inc. Corporate Environmental Information</b>	For more information about HP's commitment to the environment:  Global Citizenship Report <a href="http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html">http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html</a> Eco-label certifications <a href="http://www8.hp.com/us/en/hp-information/environment/ecolabels.html">http://www8.hp.com/us/en/hp-information/environment/ecolabels.html</a> ISO 14001 certificates: <a href="http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04755842">http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04755842</a> <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf">http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf</a>
--	---	--

### Standard Features and Configurable Modules

#### SOFTWARE COMPONENTS AND APPLICATIONS WITH WINDOWS

##### Security and Protection

McAfee\* LiveSafe™ 11

##### Productivity

Buy Office (sold separately)

Dropbox<sup>12</sup>

##### ODD Playback and TV Tuners

Power Media Player 14 for HP with DVD (ODD SKU only)<sup>13</sup>

##### Movies

Netflix<sup>14</sup>

##### App Stores and Content Purchasing

Amazon<sup>14</sup>

##### HP Utilities and Support

HP Documentation

HP JumpStarts

HP Audio Switch<sup>15</sup>

##### BTB

HP Setup Integrated OOBE

##### Hardware Enabling Drivers or software utility

HP System Event Utility

**\*NOTE:** Available for LA region only.

11. Free 1-year subscription of McAfee LiveSafe service included. Internet access required and not included. Subscription required after expiration

12. New Dropbox users are eligible to get 25 GB of Dropbox space free for 12 months from date of registration. For complete details and terms of use, including cancellation policies, visit the Dropbox website at <https://www.dropbox.com/help/space/hp-promotion>. Internet service required and not included.

13. Actual speeds may vary. Don't copy copyright-protected materials

14. Internet access required and not included.

15. Easily switch between speaker and microphone sources with intuitive controls and a consistent app experience

16. For more information visit [hp.com/go/hpsupportassistant](http://hp.com/go/hpsupportassistant) [Link will vary outside of the U.S.] HP Support Assistant is available for Android and Windows based PCs.

### Standard Features and Configurable Modules

#### POWER

##### Power Supply

180 W

ENERGY® STAR® Libra2 EPA90 (Gold) Full range 115V/230V

#### WEIGHT AND DIMENSIONS

(configured with 1 HDD and 1 ODD)

**Chassis (W x H x D)**

3.74 x 10.63 x 11.65 in (95 x 270 x 296 mm)

**System Weight**

9.23 lbs / 4.2 kg\*

\*NOTE: Weight varies by configuration and component

#### UNIT ENVIRONMENTAL AND OPERATING CONDITIONS

##### General Unit Operating Guidelines

##### Environmental and Industry

- Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range.
- Leave a 10.2 cm (4 in) clearance on all vented sides of the computer to permit the required airflow.
- Never restrict airflow into the computer by blocking any vents or air intakes.
- Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air.
- Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.
- If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.

##### Temperature Range

##### Operating:

32° to 104° F (0° to 40° C)<sup>13</sup>

##### Non-operating:

-22° to 140° F (-30° to 60° C)

##### Relative Humidity

##### Operating:

10% to 90% (non-condensing at ambient)

##### Non-operating:

0% to 95% (non-condensing at ambient)

##### Maximum Altitude (unpressurized)

##### Operating:

10,000 ft (3048 m)

##### Non-operating:

30,000 ft (9144 m)

13. Operating temperature is de-rated 1.0 deg C per 300 m (1000 ft) to 3000 m (10,000 ft) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/Hr. The upper limit may be limited by the type and number of options installed.

### Standard Features and Configurable Modules

#### SERVICE AND SUPPORT

On-site Warranty<sup>14</sup>: Available three-year (3-3-3) or one-year (1-1-1) limited warranty (varies by country) delivers on-site, next business day<sup>15</sup> service for parts and labor and complimentary limited technical support<sup>16</sup>. Three-year onsite and labor are not available in all countries. Service offers terms up to 5 years by choosing an optional HP Care Pack<sup>17</sup>. To choose the right level of service for your HP product, visit HP Care Pack Central: <http://www.hp.com/go/cpc>.

14. Terms and conditions may vary by country. Certain restrictions and exclusions apply. Other warranty variations may be offered in your region.

15. On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.

16. Technical support applies only to HP-configured and third-party HP qualified hardware and software.

17. Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. For details, visit [www.hp.com/go/cpc](http://www.hp.com/go/cpc). HP services are governed by the applicable HP terms and conditions of service provided or indicated to Customer at the time of purchase. Customer may have additional statutory rights according to applicable local laws, and such rights are not in any way affected by the HP terms and conditions of service or the HP Limited Warranty provided with your HP Product.

---

#### CERTIFICATION AND COMPLIANCE

**Energy Efficiency Compliance** ENERGY STAR<sup>®</sup> certified; EPEAT<sup>®</sup> registered where applicable. Registration varies by country. See <http://www.epeat.net> for registration status by country<sup>18</sup>

18. Based on US EPEAT<sup>®</sup> registration according to IEEE 1680.1-2018 EPEAT<sup>®</sup>. Status varies by country. Visit <http://www.epeat.net> for more information.

---

#### GRAPHICS

### Technical Specifications - Graphics

#### GRAPHICS

<b>Intel® UHD Graphics 630 (integrated on Core i7/i5/i3 processors)</b>			
<b>Intel® UHD Graphics 610 (integrated on Pentium G5400 and Celeron G4900)</b>			
<b>DisplayPort™</b>	Multimode capable; supports HDCP, DisplayPort™ Audio (2 streams), HBR2 link rates and Multi-Stream Technology for a maximum of 3 displays (including the integrated panel)		
<b>Maximum Graphics Memory</b>	Microsoft Windows 7	Windows 8.1	Windows 10
	Up to 1.7GB	Up to 1.8GB	>4 GB
	<i>Note: the actual amount of maximum graphics memory can be less than the amounts listed above depending upon your computer's configuration.</i>		
<b>Maximum Color Depth</b>	32 bits/pixel		
<b>Graphics/Video API Support</b>	8th Generation Intel® Core™ processors:		
	<ul style="list-style-type: none"> <li>With Intel® UHD Graphics 630</li> <li>DirectX 12, OpenGL 4.4, OpenCL 2.0, Intel® Quick Sync Video</li> </ul>		
	8th Generation Pentium® G5400 and Celeron® G4900		
	<ul style="list-style-type: none"> <li>With Intel® UHD Graphics 610</li> <li>DirectX 12, OpenGL 4.4, OpenCL 2.0, Intel® Quick Sync Video</li> </ul>		
<b>Supported Display Resolutions and Refresh Rates</b>			
<i>Note: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP</i>			
	<b>Resolution</b>	<b>Refresh Rates</b>	
	800x600	60 Hz	
	1024x768	60 Hz	
	1152x864	60 Hz	
	1280x600	60 Hz	
	1280x720	60 Hz	
	1280x800	60 Hz	
	1280x960	60 Hz	
	1280x1024	60 Hz	
	1360x768	60 Hz	
	1366x768	60 Hz	
	1400x1050	60 Hz	
	1440x900	60 Hz	
	1600x900	60 Hz	
	1600x1200*	60 Hz	
	1680x1050	60 Hz	
	1920x1080	60 Hz	
* Only supported on displays connected to the external DisplayPort connector.			

### Technical Specifications - Graphics

#### **NVIDIA® GeForce® GT 730 1GB Graphics Card**

<b>Engine Clock</b>	902 MHz
<b>Memory Clock</b>	1250 MHz
<b>Memory Size(width)</b>	1GB(64-bit)
<b>Memory Type</b>	128M x 32 GDDR5 @2pcs
<b>Max. Resolution(DVI)</b>	2560x1600@60Hz
<b>Max. Resolution(HDMI)</b>	4096x2160@24Hz
<b>Multi Display Support</b>	2 displays
<b>HDCP Compliance</b>	Yes
<b>Rear I/O connectors(bracket)</b>	DVI+HDMI
<b>Cooling(active/passive)</b>	Active fan-sink (Active cooling with dynamic speed)
<b>Total power consumption(W)</b>	<35W
<b>PCB form-factor with bracket</b>	LP PCB with FH/LP bracket

---

#### **NVIDIA® GeForce® GT 730 2GB Graphics Card**

<b>Engine Clock</b>	902 MHz
<b>Memory Clock</b>	1250 MHz
<b>Memory Size(width)</b>	2GB(64-bit)
<b>Memory Type</b>	256M x 32 GDDR5 @2pcs
<b>Max. Resolution(DVI)</b>	2560x1600@60Hz
<b>Max. Resolution(HDMI)</b>	4096x2160@60Hz
<b>Multi Display Support</b>	2 displays
<b>HDCP Compliance</b>	Yes
<b>Rear I/O connectors(bracket)</b>	DVI+DP
<b>Cooling(active/passive)</b>	Active fan-sink (Active cooling with dynamic speed)
<b>Total power consumption(W)</b>	<35W
<b>PCB form-factor with bracket</b>	LP PCB with FH/LP bracket

---



### Technical Specifications - Graphics

#### AMD Radeon™ R7 430 2GB Graphics Card

<b>Engine Clock</b>	780 MHz
<b>Memory Clock</b>	1100 MHz
<b>Memory Size(width)</b>	2GB(128-bit)
<b>Memory Type</b>	128M x 32 GDDR5 @4pcs
<b>Max. Resolution(VGA)</b>	2048x1536
<b>Max. Resolution(DP)</b>	4096x2160@60Hz
<b>Multi Display Support</b>	2 displays
<b>HDCP Compliance</b>	Yes
<b>Rear I/O connectors(bracket)</b>	VGA+DP
<b>Cooling(active/passive)</b>	Active fan-sink (Active cooling with dynamic speed)
<b>Total power consumption(W)</b>	<50W
<b>PCB form-factor with bracket</b>	LP PCB with FH/LP bracket

---

#### AMD Radeon™ R7 430 2GB Graphics Card

<b>Engine Clock</b>	780 MHz
<b>Memory Clock</b>	1100 MHz
<b>Memory Size(width)</b>	2GB(64-bit)
<b>Memory Type</b>	256M x 32 GDDR5
<b>Max. Resolution(VGA)</b>	2048x1536
<b>Max. Resolution(DP)</b>	4096x2160@60Hz
<b>Multi Display Support</b>	2 displays
<b>HDCP Compliance</b>	yes
<b>Rear I/O connectors(bracket)</b>	VGA+DP
<b>Cooling(active/passive)</b>	Active fan-sink (Active cooling with dynamic speed)
<b>Total power consumption(W)</b>	<50W
<b>PCB form-factor with bracket</b>	LP PCB with FH/LP bracket

---

### Technical Specifications - Storage

#### STORAGE

##### HP 2 TB\* 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive\*

<b>Capacity</b>	2 TB
<b>Rotational Speed</b>	7,200 rpm
<b>Interface</b>	SATA 6Gb/s NCQ
<b>Buffer Size</b>	64 MB
<b>Logical Blocks</b>	3,907,029,168
<b>Seek Time</b>	Read: <8.5 ms Write: <9.5 ms
<b>Height</b>	1.028 in/26.11 mm
<b>Width</b>	4.0 in/101.6 mm
<b>Operating Temperature</b>	32° to 140° F (0° to 60° C)

\*NOTE: For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 16 GB (for Windows 7) and 36 GB (for Windows 8.1/10) of system disk is reserved for the system recovery software.

##### 1TB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

<b>Capacity</b>	1 TB
<b>Rotational Speed</b>	7,200 rpm
<b>Interface</b>	Serial ATA 3.0 (6.0 Gb/s)
<b>Buffer Size</b>	32 MB
<b>Logical Blocks</b>	1,953,525,168
<b>Seek Time</b>	Read: <8.5 ms Write: <9.5 ms Full-Stroke: 21 ms
<b>Height</b>	1 in/2.54 cm
<b>Width</b>	Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)

\*NOTE: For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows 10) of system disk is reserved for the system recovery software.

##### 500GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

<b>Capacity</b>	500 GB
<b>Rotational Speed</b>	7,200 rpm
<b>Drive Type</b>	Serial ATA 3.0 (6.0 Gb/s)
<b>Interface</b>	32 MB
<b>Buffer Size</b>	976,773,168

### Technical Specifications - Storage

<b>Seek Time</b>	Single Track: 2.0 ms Average: 11 ms Full-Stroke: 21 ms
<b>Height</b>	1 in/2.54 cm
<b>Width</b>	Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)

\*NOTE: For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36 GB (for Windows 10) of system disk is reserved for the system recovery software.

---

### HP 9.5mm Desktop G2 Slim DVD Writer Drive

<b>Height</b>	9.5 mm height
<b>Orientation</b>	Either horizontal or vertical
<b>Interface type</b>	SATA/ATAPI
<b>Disc recording capacity</b>	Up to 8.5 GB DL or 4.7 GB standard
<b>Dimensions (W x H x D)</b>	5.04 x 0.37 x 5.0 in (128 x 9.5 x 127 mm) without bezel
<b>Weight (max)</b>	0.31 lb (140 g)
<b>Read Speeds</b>	DVD-R DL - Up to 6X DVD+R - Up to 8X DVD+RW - Up to 8X DVD+R DL - Up to 6X DVD-R - Up to 8X DVD-RW - Up to 6X CD-R - Up to 24X CD-RW - Up to 10X DVD-RW, DVD+RW - Up to 8X DVD-R DL, DVD+R DL - Up to 8X DVD+R, DVD-R - Up to 8X DVD-ROM DL, DVD-ROM - Up to 8X CD-ROM, CD-R - Up to 24X CD-RW - Up to 24X
<b>Access time (typical reads, including settling)</b>	Random DVD-ROM: 170 ms (typical), CD-ROM: 170 ms (typical) Full Stroke DVD-ROM: 320 ms (typical), CD-ROM: 320 ms (typical) Stop Time 6 seconds (typical)
<b>Power</b>	Source Slimline SATA DC power receptacle DC Power Requirement 5 VDC ± 5%-100 mV ripple p-p DC Current 5 VDC (< 1000 mA typical, 1600 mA maximum)
<b>Environmental conditions (operating - non-condensing)</b>	Temperature 41° to 122° F (5° to 50° C) Relative Humidity 10% to 80% Maximum Wet Bulb Temperature 84° F (29° C)

### Technical Specifications - Storage

#### HP 9.5mm Desktop G2 Slim DVD-ROM Drive

<b>Height</b>	9.5 mm height
<b>Orientation</b>	Either horizontal or vertical
<b>Interface type</b>	SATA/ATAPI
<b>Disc recording capacity</b>	Up to 8.5 GB DL or 4.7 GB standard
<b>Dimensions (W x H x D)</b>	5.04 x 0.37 x 5.0 in (128 x 9.5 x 127 mm) without bezel
<b>Weight (max)</b>	0.31 lb (140 g)
<b>Read Speeds</b>	DVD-R DL - Up to 6X DVD+R - Up to 8X DVD+RW - Up to 8X DVD+R DL - Up to 6X DVD-R - Up to 8X DVD-RW - Up to 6X CD-R - Up to 24X CD-RW - Up to 10X DVD-RW, DVD+RW - Up to 8X DVD-R DL, DVD+R DL - Up to 8X DVD+R, DVD-R - Up to 8X DVD-ROM DL, DVD-ROM - Up to 8X CD-ROM, CD-R - Up to 24X CD-RW - Up to 24X
<b>Access time (typical reads, including settling)</b>	Random DVD-ROM: 170 ms (typical), CD-ROM: 170 ms (typical) Full Stroke DVD-ROM: 320 ms (typical), CD-ROM: 320 ms (typical) Stop Time 6 seconds (typical)
<b>Power</b>	Source Slimline SATA DC power receptacle DC Power Requirement 5 VDC $\pm$ 5%-100 mV ripple p-p DC Current 5 VDC (< 1000 mA typical, 1600 mA maximum)
<b>Environmental conditions (operating - non-condensing)</b>	Temperature 41° to 122° F (5° to 50° C) Relative Humidity 10% to 80% Maximum Wet Bulb Temperature 84° F (29° C)

#### 128 GB M.2 2280 PCIe NVMe SSD

<b>Drive Weight</b>	< 10g
<b>Capacity</b>	128GB
<b>Height</b>	2.38mm
<b>Length</b>	80mm
<b>Width</b>	22mm
<b>Interface</b>	PCIe Gen3
<b>Maximum Sequential Read</b>	Up to 1400MB/s
<b>Maximum Sequential Write</b>	Up to 395MB/s
<b>Logical Blocks</b>	250,069,680
<b>Operating Temperature</b>	0° to 70°C (32° to 158°F) [ambient temp]
<b>Features</b>	APST; ASPM L1.2; NVMe spec 1.2

**NOTE:** For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36 GB (for Windows 10) of system disk is reserved for the system recovery software.

### Technical Specifications - Storage

#### 256 GB M.2 2280 PCIe NVMe SSD

<b>Drive Weight</b>	< 10g
<b>Capacity</b>	256 GB
<b>Height</b>	2.38mm
<b>Length</b>	80mm
<b>Width</b>	22mm
<b>Interface</b>	PCIe Gen3
<b>Maximum Sequential Read</b>	Up to 1600MB/s
<b>Maximum Sequential Write</b>	Up to 780MB/s
<b>Logical Blocks</b>	500,118,192
<b>Operating Temperature</b>	0° to 70°C (32° to 158°F) [ambient temp]
<b>Features</b>	APST; ASPM L1.2; NVME spec 1.2

**NOTE:** For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36 GB (for Windows 10) of system disk is reserved for the system recovery software.

#### 512 GB M.2 2280 PCIe NVMe SSD

<b>Drive Weight</b>	< 10g
<b>Capacity</b>	512 GB
<b>Height</b>	2.38mm
<b>Length</b>	80mm
<b>Width</b>	22mm
<b>Interface</b>	PCIe Gen3
<b>Maximum Sequential Read</b>	Up to 1600MB/s
<b>Maximum Sequential Write</b>	Up to 860MB/s
<b>Logical Blocks</b>	1,000,215,216
<b>Operating Temperature</b>	0° to 70°C (32° to 158°F) [ambient temp]
<b>Features</b>	APST; ASPM L1.2; NVME spec 1.2

**NOTE:** For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36 GB (for Windows 10) of system disk is reserved for the system recovery software.

#### 128GB 2.5in SATA Three Layer Cell SSD

<b>Drive Weight</b>	<50g
<b>Capacity</b>	128GB
<b>Height</b>	7mm
<b>Length</b>	100.45mm
<b>Width</b>	69.85mm
<b>Interface</b>	SATA 3.0 (6Gb/s)

### Technical Specifications - Storage

<b>Performance</b>	Up to Random Read/Write = 70K/40K IOPS
<b>Maximum Sequential Read</b>	Up to 530MB/s
<b>Maximum Sequential Write</b>	Up to 380MB/s
<b>Logical Blocks</b>	250,069,680
<b>Operating Temperature</b>	0° to 70°C (32° to 158°F) [ambient temp]
<b>Features</b>	DIPM; TRIM

**NOTE:** For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36 GB (for Windows 10) of system disk is reserved for the system recovery software.

---

#### 256GB 2.5in SATA Three Layer Cell SSD

<b>Drive Weight</b>	<62g
<b>Capacity</b>	256GB
<b>Height</b>	7mm
<b>Length</b>	100.45mm
<b>Width</b>	69.85mm
<b>Interface</b>	SATA 3.0 (6Gb/s)
<b>Performance</b>	Up to Random Read/Write = 55K/68K IOPS
<b>Maximum Sequential Read</b>	Up to 530MB/s
<b>Maximum Sequential Write</b>	Up to 450MB/s
<b>Logical Blocks</b>	500,118,192
<b>Operating Temperature</b>	0° to 70°C (32° to 158°F) [ambient temp]
<b>Features</b>	DIPM; TRIM

**NOTE:** For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36 GB (for Windows 10) of system disk is reserved for the system recovery software.

---

### Technical Specifications - Audio

#### AUDIO

Audio control

Front side Combo jack for supporting CTIA, Rear side Line-in/ Line-out/ Mic-in jacks

---

#### High Definition Audio

<b>Type</b>	Integrated
<b>HD Audio Codec</b>	Realtek ALC3601
<b>Audio I/O Ports</b>	Front side Combo jack for supporting CTIA, Rear side Line-in/ Line-out/ Mic-in jacks
<b>Wavetable Syntheses</b>	Yes
<b>Analog Audio</b>	Yes
<b>Internal Speaker</b>	NA
<b>DAC Sampling Rates</b>	16 to 24-bit; 44.1K/ 48 K/96K / 192K Hz
<b>ADC Sampling Rates</b>	16 bit, 44.1K/ 48K/ 96K/ 192K Hz

---

### Technical Specifications - Power

#### POWER SUPPLY

<b>Operating Voltage Range</b>	90 – 264 VAC
<b>Rated Voltage Range</b>	100-240V AC
<b>Rated Line Frequency</b>	50/60 HZ
<b>Operating Line Frequency</b>	47 – 63 Hz
<b>Rated Input Current</b>	180W : <2.3A
<b>Rated Input Current with Energy Efficient* Power Supply</b>	88/91/88% efficient at 20/50/100% load (230V)
<b>DC Output</b>	+12.1V
<b>Current Leakage (NFPA 99: 2102)</b>	Less than 500 microamps of leakage current at 120 Vac with the ground wire disconnected, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1. Less than 100 microamps of leakage current at 120 Vac with the ground wire intact with normal polarity, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1.
<b>Power Supply Fan</b>	50*20mm (linear type)

---



### Technical Specifications – Weights and Dimensions

#### WEIGHTS AND DIMENSIONS

<b>Chassis (W x H x D)</b>	3.74 x 10.63 x 11.65 in (95 x 270 x 296 mm)
<b>System Volume</b>	463.16cu in 7.6L
<b>System Weight*</b>	9.23 lbs / 4.2 kg
<b>Tower Stand (H x W x D)</b>	10.73 x 3.74 x 11.65 in (272.6 x 95 x 296 mm)
<b>Packaged (H x W x D)</b>	13.46 x 7.72 x 19.65 in 342 x 196 x 499 mm
<b>Shipping Weight*</b>	13.2 lb / 6 kg
<b>Shipping Weight (Molded Pulp)*</b>	13.86 lb / 6.3 kg
<b>Palletization Profile</b>	12-units per layer 6 layer max 72 per pallet Footprint (H x W x D) 85.91 x 39.37 x 47.24 in (2182 x 1000 x 1200 mm)

\*NOTE: Weight varies by configuration and component

---

### Technical Specifications – Miscellaneous Features

#### ADDITIONAL FEATURES

**SMART Technology (Self-Monitoring, Analysis and Reporting Technology)**

**Description**

Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted

### Technical Specifications – Networking

#### NETWORKING

##### 10/100/1000 Integrated NIC

<b>Ethernet Features</b>	<p>10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14)</p> <p>100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30)</p> <p>1000 Mbit/s operation (1000BASE-T; IEEE 802.3ab; IEEE 8023 clauses 40)</p> <p>Auto-Negotiation (Automatic Speed Selection)</p> <p>Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s</p>
<b>Power Management</b>	<p>ACPI compliant – multiple power modes</p> <p>Situation-sensitive features reduce power consumption</p> <p>Advanced link down power saving for reducing link down power consumption</p>
<b>Performance Features</b>	<p>TCP/IP/UDP Checksum Offload (configurable)</p> <p>Protocol Offload (ARP &amp; NS)</p> <p>Large send offload and Giant send offload</p> <p>Receiving Side Scaling</p> <p>Jumbo Frame 9K</p>
<b>Manageability</b>	<p>Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only)</p> <p>PXE 2.1 Remote Boot</p> <p>Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30))</p> <p>Comprehensive diagnostic and configuration software suite</p> <p>Virtual Cable Doctor for Ethernet cable status</p>

##### Realtek 802.11ac (1x1) WiFi and Bluetooth® 4.2 Combo \*

<b>Wireless LAN Standards</b>	<p>IEEE 802.11a</p> <p>IEEE 802.11b</p> <p>IEEE 802.11g</p> <p>IEEE 802.11n</p> <p>IEEE 802.11ac</p>	
<b>Interoperability</b>	<p>Wi-Fi certified</p>	
<b>Frequency Bands</b>	<p>802.11b/g/n</p>	<p>•2.402 – 2.482 GHz</p> <p><i>Note: The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.</i></p>
	<p>802.11a/n</p>	<p>•4.9 – 4.95 GHz (Japan)</p> <p>•5.15 – 5.25 GHz</p> <p>•5.25 – 5.35 GHz</p> <p>•5.47 – 5.725 GHz</p> <p>•5.825 – 5.850</p>
<b>Data Rates</b>	<ul style="list-style-type: none"> <li>• 802.11b: 1, 2, 5.5, 11 Mbps</li> <li>• 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li> <li>• 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li> <li>• 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)</li> <li>• 802.11ac : MCS0 ~ MCS9, (1SS, and 2SS) (20MHz, 40MHz, and 80MHz)</li> </ul>	

### Technical Specifications – Networking

<b>Modulation</b>	<p>Direct Sequence Spread Spectrum</p> <p>BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM</p>
<b>Security<sup>1</sup></b>	<ul style="list-style-type: none"> <li>• IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only</li> <li>• AES-CCMP: 128 bit in hardware</li> <li>• 802.1x authentication</li> <li>• WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.</li> <li>• WPA2 certification</li> <li>• IEEE 802.11i</li> <li>• Cisco Certified Extensions, all versions through CCX4 and CCX Lite</li> <li>• WAPI</li> </ul> <p><sup>1</sup> Check latest software/driver release for updates on supported security features.</p>
<b>Network Architecture Models</b>	<p>Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)</p>
<b>Roaming<sup>2</sup></b>	<p>IEEE 802.11 compliant roaming between access points</p>
<b>Output Power<sup>2</sup></b>	<ul style="list-style-type: none"> <li>• 802.11b : +14dBm minimum</li> <li>• 802.11g : +12dBm minimum</li> <li>• 802.11a : +12dBm minimum</li> <li>• 802.11n HT20(2.4GHz) : +12dBm minimum</li> <li>• 802.11n HT40(2.4GHz) : +12dBm minimum</li> <li>• 802.11n HT20(5GHz) : +10dBm minimum</li> <li>• 802.11n HT40(5GHz) : +10dBm minimum</li> <li>• 802.11ac VHT80(5GHz) : +10dBm minimum</li> </ul>
<b>Power Consumption</b>	<ul style="list-style-type: none"> <li>• Transmit mode 2.0 W</li> <li>• Receive mode 1.6 W</li> <li>• Idle mode (PSP) 180 mW (WLAN Associated)</li> <li>• Idle mode 50 mW (WLAN unassociated)</li> <li>• Connected Standby 10 mW</li> <li>• Radio disabled 8 mW</li> </ul>
<b>Power Management</b>	<p>ACPI and PCI Express compliant power management 802.11 compliant power saving mode</p>
<b>Receiver Sensitivity<sup>3</sup></b>	<p>802.11b, 1Mbps : -93.5dBm maximum 802.11b, 11Mbps : -84dBm maximum 802.11a/g, 6Mbps : -86dBm maximum 802.11a/g, 54Mbps : -72dBm maximum 802.11n, MCS07 : -67dBm maximum 802.11n, MCS15 : -64dBm maximum 802.11ac, MCS0 : -84dBm maximum 802.11ac, MCS9 : -59dBm maximum</p>

### Technical Specifications – Networking

	<sup>3</sup> Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).	
<b>Antenna type</b>	High efficiency antenna. One embedded dual band 2.4/5 GHz antenna is provided to the card to support WLAN communications and Bluetooth communications	
<b>Form Factor</b>	PCI-Express M.2 MiniCard	
<b>Dimensions</b>	Type 2230 : 2.3 x 22.0 x 30.0 mm	
<b>Weight</b>	Type 2230 : 2.8g	
<b>Operating Voltage</b>	3.3v +/- 9%	
<b>Temperature</b>	<b>Operating:</b>	14° to 158° F (-10° to 70° C)
	<b>Non-operating:</b>	-40° to 176° F (-40° to 80° C)
<b>Humidity</b>	<b>Operating:</b>	10% to 90% (non-condensing)
	<b>Non-operating:</b>	5% to 95% (non-condensing)
<b>Altitude</b>	<b>Operating:</b>	0 to 10,000 ft (3,048 m)
	<b>Non-operating:</b>	0 to 50,000 ft (15,240 m)
<b>LED Activity</b>	LED Amber – Radio OFF; LED White – Radio ON	
5. Wireless access point and Internet service required and not included. Availability of public wireless access points limited.		

#### HP Integrated Module with Bluetooth 4.0/4.1/4.2 Wireless Technology

<b>Bluetooth Specification</b>	4.0/4.1/4.2 Compliant
<b>Frequency Band</b>	2402 to 2480 MHz
<b>Number of Available Channels</b>	Legacy : 0~79 (1 MHz/CH) BLE : 0~39 (2 MHz/CH)
<b>Data Rates and Throughput</b>	Legacy : 3 Mbps data rate; throughput up to 2.17 Mbps BLE : 1 Mbps data rate; throughput up to 0.2 Mbps Legacy : Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Legacy : Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)
<b>Transmit Power</b>	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of + 4 dBm for BR and EDR.
<b>Receiver Sensitivity Legacy</b>	
<b>Power Consumption</b>	Peak (Tx) 330 mW Peak (Rx) 230 mW Selective Suspend 17 mW
<b>Range</b>	Legacy : 0~79 (1 MHz/CH) BLE : 0~39 (2 MHz/CH)

### Technical Specifications – Networking

<b>Electrical Interface</b>	USB 2.0 compliant
<b>Bluetooth Software Supported Link Topology</b>	Microsoft Windows Bluetooth Software
<b>Power Management Certifications</b>	Microsoft Windows ACPI, and USB Bus Support
<b>Certifications Bluetooth Profiles Supported</b>	BT4.1-ESR 5/6/7 Compliance LE Link Layer Ping LE Dual Mode LE Link Layer LE Low Duty Cycle Directed Advertising LE L2CAP Connection Oriented Channels Train Nudging & Interlaced Scan BT4.2 ESR08 Compliance LE Secure Connection- Basic/Full LE Privacy 1.2 –Link Layer Privacy LE Privacy 1.2 –Extended Scanner Filter Policies LE Data Packet Length Extension FAX Profile (FAX) Basic Imaging Profile (BIP)2 Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)

After-Market Options (availability may vary by region)

### AFTER MARKET OPTIONS

<b><u>Type</u></b>	<b><u>Description</u></b>	<b><u>Part #</u></b>
<b>Memory</b>	HP 4GB DDR4-2666 DIMM	3TK85AA
	HP 8GB DDR4-2666 DIMM	3TK87AA
	HP 16GB DDR4-2666 DIMM	3TK83AA
<b>Storage</b>	HP 500GB SATA 6.0Gb/s Hard Drive	QK554AA
	HP 1TB 7200rpm SATA 6Gbps Hard Drive	QK555AA
	HP Turbo Drive Gen2 256GB M.2 SSD Drive	1CA51AA
	HP 256GB SATA TLC Non-SED Solid State Drive	P1N68AA
	HP 9.5mm G3 8/6/4 SFF G4 400 SFF/MT DVD Writer	1CA53AA
<b>Graphics</b>	Nvidia® GT 730 2GB DP Card	Z9H51AA
	AMD Radeon™ R7 430 Card	1MX32AA
<b>Security</b>	HP Business PC Security Lock V2 Kit	N3R93AA
	HP Keyed Cable Lock 10mm kit	T1A62AA
<b>Adapters</b>	HP PCIe x1 Parallel Port Card	N1M40AA
	HP HDMI Standard Cable Kit	T6F94AA
	HP USB to Serial Port Adapter	J7B60AA
<b>Networking</b>	Intel Ethernet I210-T1 GbE NIC Card	E0X95AA
<b>Input</b>	HP USB Mouse	QY777AA
	HP USB Hardened Mouse	P1N77AA
	HP USB Keyboard	QY776AA
	HP USB Business Slim Keyboard	N3R87AA
	HP Conferencing Keyboard	K8P74AA
	HP USB Antimicrobial Slim Keyboard and Mouse	Z9H50AA
<b>Others</b>	HP Business Headset v2	T4E61AA
	HP USB Business Speakers v2	N3R89AA

### Change Log

© Copyright 2020 HP Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel, Celeron®, Core, Pentium are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a trademark of its proprietor, used by HP Inc. under license. NVIDIA, GeForce, Kepler and NVS are trademarks and/or registered trademarks of NVIDIA Corporation in the U.S. and other countries. AMD and Radeon are trademarks of Advanced Micro Devices, Inc. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency. DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.

Date of change:	Version History:		Description of change:																								
May 14, 2018	From v1 to v2	Added	Environmental Tab																								
July 5, 2018	From v2 to v3	Update	Redundant wording removed from pages 2,4,6,7,15 and 22.																								
August 7, 2018	From v3 to v4	Update	Correction made and footnote added to weight specs.																								
August 17, 2018	From v4 to v5	Update	<table border="0"> <tr> <td>Page</td> <td>Item</td> </tr> <tr> <td>1</td> <td>Remove redundant wording</td> </tr> <tr> <td>3</td> <td>Update “same” to “some”</td> </tr> <tr> <td>5</td> <td>Remove redundant information for graphic and memory note</td> </tr> <tr> <td>7</td> <td>Remove redundant wording</td> </tr> <tr> <td>8</td> <td>Remove redundant wording / Add “*” for EPETA</td> </tr> <tr> <td>9</td> <td>Add “*” for EPEAT</td> </tr> <tr> <td>11</td> <td>Add disclaimer for EPEAT/Move Bays from 11 to page 8</td> </tr> <tr> <td>13-14</td> <td>Remove “Certification”</td> </tr> <tr> <td>23</td> <td>Remove redundant 128 M.2 TLC card, and add below 128 2.5” SATA TLC SSD</td> </tr> <tr> <td>24</td> <td>Remove redundant 256 M.2 TLC card, and add below 256 2.5” SATA TLC SSD</td> </tr> <tr> <td>25</td> <td>Remove redundant information</td> </tr> </table>	Page	Item	1	Remove redundant wording	3	Update “same” to “some”	5	Remove redundant information for graphic and memory note	7	Remove redundant wording	8	Remove redundant wording / Add “*” for EPETA	9	Add “*” for EPEAT	11	Add disclaimer for EPEAT/Move Bays from 11 to page 8	13-14	Remove “Certification”	23	Remove redundant 128 M.2 TLC card, and add below 128 2.5” SATA TLC SSD	24	Remove redundant 256 M.2 TLC card, and add below 256 2.5” SATA TLC SSD	25	Remove redundant information
Page	Item																										
1	Remove redundant wording																										
3	Update “same” to “some”																										
5	Remove redundant information for graphic and memory note																										
7	Remove redundant wording																										
8	Remove redundant wording / Add “*” for EPETA																										
9	Add “*” for EPEAT																										
11	Add disclaimer for EPEAT/Move Bays from 11 to page 8																										
13-14	Remove “Certification”																										
23	Remove redundant 128 M.2 TLC card, and add below 128 2.5” SATA TLC SSD																										
24	Remove redundant 256 M.2 TLC card, and add below 256 2.5” SATA TLC SSD																										
25	Remove redundant information																										
August 21, 2018	From v5 to v6	Update	Weight and dimensions / dimensions and weight updated																								
October 17, 2018	From v6 to v7	Update	Audio Line out and Audio Link in switched, pages 2 and 7																								
November 5, 2018	From V7 to V8	Update	Note added for Security and Protection “Wi-Di” removed from footnote 5																								
March 13, 2019	From V8 to V9	Refresh	Document refresh																								
March 18, 2019	From V9 to V10	Update	Processor i5-9400 removed																								
March 21, 2019	From V10 to V11	Update	Processor i5-9400 put back on																								
April 23, 2019	From V11 to V12	Refresh	Processors under embargo added to official QS refresh																								
June 7, 2019	From V12 to V13	Update	i7-9700/i5-9400F/i5-9500F processors added HP Recovery Manager PBR and ePrint removed Paging break out corrected																								
June 11, 2019	From V13 to V14	Update	HP Recovery Manager removed																								
July 2, 2019	From V14 to V15	Update	CPU Intel Core i3-9300, i5-9600 and Pentium gold G5620 added and Intel® Core™ i7-9700 removed to/from processors section																								
August 1, 2019	From V15 to V16	Update	Pentium G5600 added to processors section																								
August 16, 2019	From V16 to V17	Update	Security lock slot upgraded to Standard																								
August 21, 2019	From V17 to V18	Update	Intel® Core™ i7-9700 put back in processors section																								
October 3, 2019	From V18 to V19	Update	Miscellaneous Features added																								
November 13, 2019	From V19 to V20	Update	EPEAT references updated																								
March 3, 2020	From V20 to V21	Update	Intel® Core™ i7-9700 Max turbo data corrected																								