


### Overview

#### HP 285 G3 Microtower Business PC

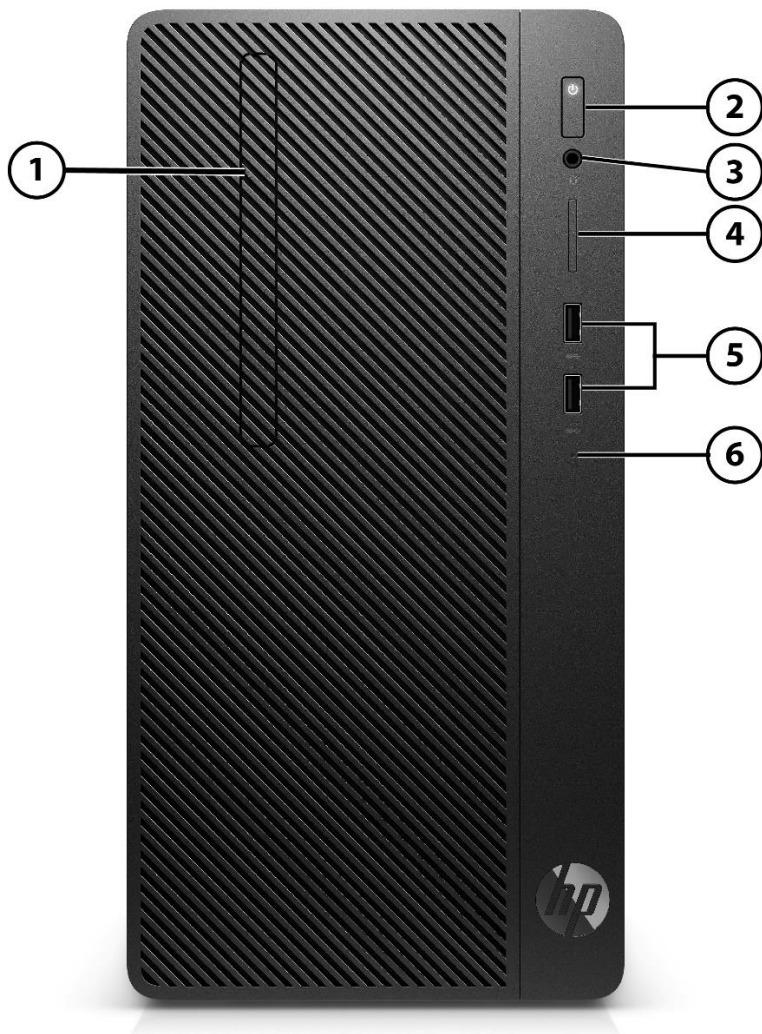

#### Front


1. Slim-height Bay - supporting an optical disk drive (optional)
2. Power Button
3. Combo jack, Headphone/ Microphone
4. SD Card Reader
5. (2) USB 3.1 Gen1 Ports
6. HDD LED light

#### Not Shown

- (1) PCI Express x16
- (1) PCI x1
- (1) PCI Express x1
- (1) M.2 for WLAN
- (1) M.2 2242/2280 storage
- (1) 3.5" internal HDD bay
- (1) 3.5"/2.5" internal HDD bay (share bay)

### Overview

#### HP 285 G3 Microtower Business PC

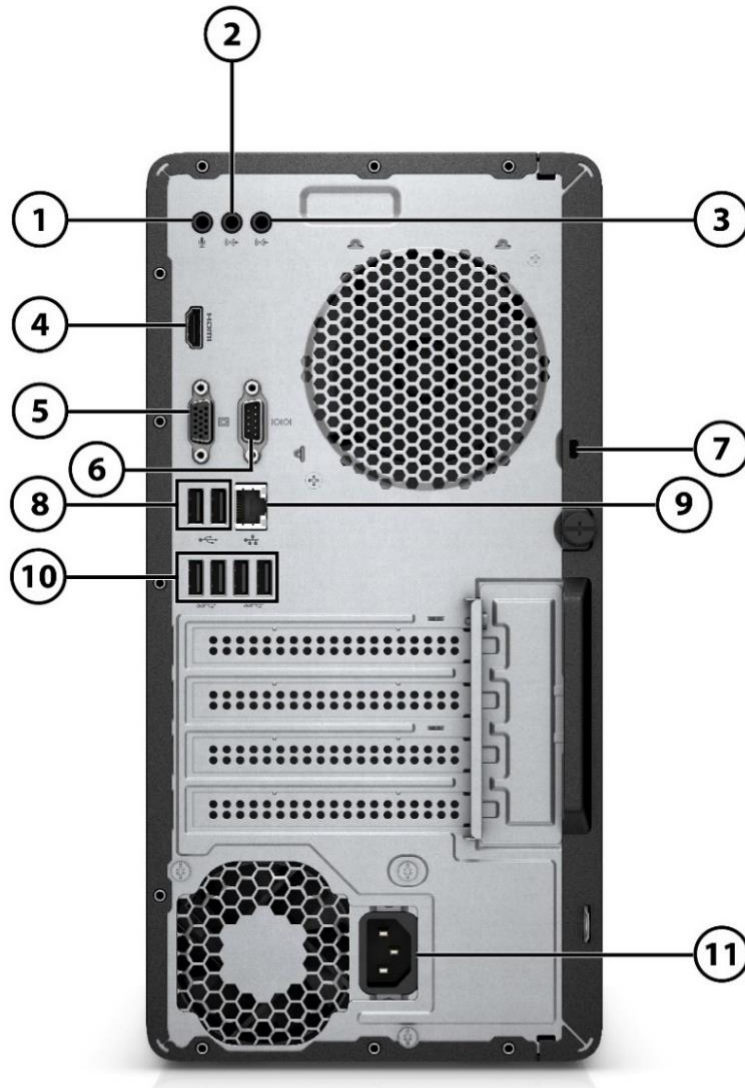

#### Rear

1. Audio Mic in
2. Audio Line out
3. Audio Link in
4. HDMI Port\*
5. VGA Port\*
6. Serial Port
7. Security Lock Slot
8. (2) USB 2.0 Port
9. RJ-45 Network Connector
10. (4) USB 3.1 Gen1 Port
11. Power Cord Connector

#### Not Shown

Parallel Port (Optional via PCIe1 slot)  
PS/2 Ports (Optional)

Optional 4 Serial Port PCIe Card\*\*

**\*NOTE:** Port will be covered up when discrete graphic card is configured on shipped machine.

**\*\*NOTE:** Only available on selected models.

### Standard Features and Configurable Modules

#### AT A GLANCE

- Windows 10 Pro, Windows 10 Home or FreeDos 2.0
- AMD B350 Chipset, supporting AMD Integrated Radeon™ R5/R7 Graphics
- Supports an optional discrete graphics card
- Integrated 10/100/1000 Ethernet Controller or Realtek ac 1x1+BT 4.2 LE with 1 Antenna
- Up to 32 GB DDR4-2666 Unbuffered Memory (UDIMM)
- Independent monitor support via VGA/HDMI interfaces
- Supports both Hard Disk Drives and SATA TLC / M.2 PCIe NVMe Solid State Drives
- Audio in, Audio out and Mic in support 5.1 channel
- 8 USB ports (including 6 USB 3.1 Gen1)
- 180W/310W 90% HE power supply
- Security cable lock supported (sold separately)
- Protected by HP Services; terms and conditions vary by country; certain restrictions and exclusions apply
- TPM 2.0 support (fTPM)<sup>1</sup>
- Dust filter available

1. TPM feature will not be supported on machines pre-configured with FreeDOS

In selected countries, machines pre-configured with Windows OS will be shipped with TPM disabled.

**NOTE: See important legal disclosures for all listed specs in their respective features sections.**

### Standard Features and Configurable Modules

#### PRODUCT NAME

HP 285 G3 Microtower Business PC

#### OPERATING SYSTEM

<b>Preinstalled</b>	Windows 10 Pro 64 <sup>1</sup> Windows 10 Home 64 <sup>1</sup>
<b>Pre-installed (other)</b>	FreeDOS 2.0

1. Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows 10 is automatically updated, which is always enabled. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.windows.com/>

#### PROCESSORS<sup>2</sup>

##### AMD® PRO A6

APU AMD PRO A6-9500 7Gen Dual Core 3.5GHz LGA 65W  
(Boost Clock 3.8GHz, 1MB L2 Cache, 2 cores)

##### AMD® PRO A8

APU AMD PRO A8-9600 7Gen Quad Core 3.1GHz LGA 65W  
(Boost Clock 3.4GHz, 2MB L2 Cache, 4 cores)

##### AMD® PRO A10

APU AMD PRO A10-9700 7Gen Quad Core 3.5GHz LGA 65W  
(Boost Clock 3.8GHz, 2MB L2 Cache, 4 cores)

##### AMD® PRO A12

APU AMD PRO A12-9800 7Gen Quad Core 3.8GHz LGA 65W  
(Boost Clock 4.2GHz, 2MB L2 Cache, 4 cores)

##### AMD® Ryzen3 Pro

CPU AMD Ryzen3- PRO 1200 Quad Core 3.1GHz LGA 65W  
(Boost Clock 3.4GHz, 2MB L2 Cache / 8MB L3 Cache, 4 cores)

APU AMD Ryzen3- PRO 1300 Quad Core 3.5GHz LGA 65W  
(Boost Clock 3.7GHz, 2MB L2 Cache / 8MB L3 Cache, 4 cores)

APU AMD Ryzen3- Pro 2100GE\* Dual Core 3.2GHz LGA 35W with Radeon™ Vega Graphics  
Supports DDR4 memory up to 2666 MT/s data rate

AMD Ryzen3 2200G\* Quad Core 3.5GHz LGA 65W with Radeon™ Vega 8 Graphics  
(Boost Clock 3.7GHz, 2MB L2 Cache / 4MB L3 Cache, 4 cores)

APU AMD Ryzen3- PRO 2200G\*\* Quad Core 3.5GHz LGA 65W with Radeon™ Vega 8 Graphics  
(Boost Clock 3.7GHz, 2MB L2 Cache / 4MB L3 Cache, 4 cores)

##### AMD® Ryzen5 Pro

CPU AMD Ryzen5 PRO 1500 4C 3.5GHz LGA 65W  
(Boost Clock 3.7GHz, 2MB L2 Cache / 16MB L3 Cache, 4 cores)

### Standard Features and Configurable Modules

AMD Ryzen5 2400G 4C 3.6GHz LGA 65W  
with Radeon™ RX Vega 11 Graphics (Boost Clock 3.9GHz, 2MB L2 Cache / 4MB L3 Cache, 4 cores)

APU AMD Ryzen5 PRO 2400G\*\*\* 4C 3.6GHz LGA 65W  
with Radeon™ RX Vega 11 Graphics (Boost Clock 3.9GHz, 2MB L2 Cache / 4MB L3 Cache, 4 cores)

CPU AMD Ryzen5 PRO 2600 Core 3.4GHz LGA 65W  
(Boost Clock 3.9GHz, 3MB L2 Cache / 16MB L3 Cache, 6 cores)

#### **AMD® Ryzen7 Pro**

AMD Ryzen7 PRO 2700\*\*\* Processor Eight Core 3.2GHz LGA 65W  
(Boost Clock 4.1GHz, 4MB L2 Cache / 16MB L3 Cache, 8 cores)

2. Multi-core is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. AMD's numbering is not a measurement of clock speed.

**\*NOTE:** Only available on selected models.

**\*\*NOTE:** Only available on selected models in specific regions.

**\*\*\*NOTE:** Only for specific regions.

---

### CHIPSET

AMD B350

---

### Standard Features and Configurable Modules

#### GRAPHICS<sup>3</sup>

##### Integrated

AMD Integrated HD Graphics varies by processors

##### Discrete Graphics<sup>4</sup>

AMD® Radeon™ RX550 4GB FH PCIe x16

AMD Radeon™ R7 430 2GB FH DP VGA PCIe x8

NVIDIA® GeForce® GT730 1GB PCIe x8 HDMI GFX

NVIDIA® GeForce® GT730 2GB PCIe x8 DP GFX

3. HD content required to view HD images.

4. Sold separately or as an optional feature.

#### MEMORY<sup>5</sup>

##### Form Factor

Microtower

##### Type

DDR4 2666 1.2v (Transfer rates up to 2666 MT/s)

##### Maximum

32 GB capacity

##### # of Slots

2 DIMM

4GB DDR4-2666 UDIMM NECC (1x4GB)

8GB DDR4-2666 UDIMM NECC (1x8GB)

8GB DDR4-2666 UDIMM NECC (2x4GB)

16GB DDR4-2666 UDIMM NECC (1x16GB)

16GB DDR4-2666 UDIMM NECC (2x8GB)

5. Running at 2400 MT/s when configure w/ A-series APU.

### Standard Features and Configurable Modules

#### STORAGE<sup>6</sup>

**SATA3 - 3.5" or 2.5" 6Gb/s HDDs**

2TB 7200 RPM SATA Hard Disk Drive  
1TB 7200 RPM SATA Hard Disk Drive  
500GB 7200 RPM SATA Hard Disk Drive  
128GB 2.5" TLC SSD  
256GB 2.5" TLC SSD

**M.2 Solid State Drives**

128 GB M.2 2280 PCIe NVMe SSD  
256 GB M.2 2280 PCIe NVMe SSD  
512 GB M.2 2280 PCIe NVMe SSD

**SD Card Reader<sup>7</sup>**

SD/SDHC/SDXC SD Card Reader

6. For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36 GB (for Windows 10) of system disk is reserved for the system recovery software.

7. Card sold separately

#### OPTICAL DISK DRIVES<sup>8</sup>

DVD-ROM 9.5mm  
DVD-Writer 9.5mm

8. Optical drives are optional or add on features. Duplication of copyrighted material is strictly prohibited. Actual speeds may vary. Double Layer media compatibility will widely vary with some home DVD players and DVD-ROM drives.

#### NETWORKING/COMMUNICATIONS<sup>9</sup>

**Networking**

Integrated 10/100/1000M GbE LAN

**Wi-Fi and Bluetooth<sup>®</sup>**

ac 1x1 +Bluetooth 4.2 LE M.2 2230 PCI-e+USB WW with 1 Antenna

9. Wireless cards are optional or add-on features and requires separately purchased wireless access point and internet service. Availability of public wireless access points limited.

#### AUDIO/MULTIMEDIA

Realtek ALC3601  
Combo Jack, Headphone/ Microphone  
Support 2W Internal speaker

### Standard Features and Configurable Modules

#### KEYBOARDS/POINTING DEVICES<sup>10</sup>

##### Keyboards

- USB Business Slim Wired Keyboard
- HP USB Keyboard
- Business Slim USB Antimicrobial Wired Keyboard (China)
- Business Slim PS/2 Wired Keyboard
- No KB Option

##### Mouse

- Antimicrobial USB Mouse (China)
- HP Optical USB Mouse
- Universal Wired Mouse USB
- USB Hardened Mouse (India)
- HP PS/2 Mouse (for machine configured with PS/2 port)
- No Mouse Option

10. Keyboards and mouse are optional or add-on features.

#### PORTS/SLOTS

##### Front I/O Ports

- Combo jack, Headphone/ Microphone
- SD Card Reader
- (2) USB 3.1 Gen1 Ports

##### Rear I/O Ports

- Audio Mic in
- Audio Line out
- Audio Link in
- HDMI Port\*
- VGA Port\*

##### Serial Port

- (2) USB 2.0 Port
- RJ-45 Network Connector
- (4) USB 3.1 Gen1 Port

##### Not Shown

- PS/2 Ports (Optional)
- Parallel Port (Optional via PCIe1 slot)

\*NOTE:Port will be covered up when discrete graphic card is configured on shipped machine.

#### BAYS

- 9.5mm external slimline ODD bay (optional)
- 3.5" internal HDD bay
- 3.5 or 2.5" internal HDD bay (share bay)



### Standard Features and Configurable Modules

#### **SOFTWARE COMPONENTS AND APPLICATIONS WITH WINDOWS**

##### **Preinstalled Software (varies by country)**

Preinstalled (varies by country)

##### **Security and Protection**

McAfee\* LiveSafe™ (1 year subscription)<sup>13</sup>

##### **Productivity**

Microsoft Office Pro 2016 and Office 365 (Office Centennial)

Dropbox<sup>12</sup>

##### **Movies**

Netflix

Amazon

##### **HP Utilities and Support**

HP Documentation

HP JumpStart

HP SSRM

HP Audio Switch

HP Support Assistant

##### **BTB**

HP Setup Integrated OOBE

Bing

##### **Hardware Enabling Drivers or software utility**

HP System Event Utility

Netclone

**\*NOTE:** Available for LA region only.

12. 25GB of storage for 12 months. Subscription required thereafter or for additional storage capacity.

13. Subscription required.

---

### Standard Features and Configurable Modules

#### POWER

##### Power Supply

##### 180 W

EStar Libra2 EPA90 (Gold) Full range 115V/230V

##### 310 W<sup>15</sup>

SFF ENTL EPA90 (Gold) Full range 115V/230V

15. 310W PSU selected countries only.

#### DIMENSIONS & WEIGHT

(configured with 1 HDD and 1 ODD)

##### Chassis (H x W x D)

13.3 x 6.69 x 10.79 in (338 x 170 x 274 mm)

##### System Weight

11.9 lbs / 5.4 kg

##### Packaging dimensions and weight

##### Dimensions

11.46 x 15.35 x 19.65 in  
291 x 390 x 499 mm

##### Weight

17.64lb / 8 kg

##### Security Features

TPM 2.0 support (fTPM)<sup>16</sup>

Security cable slot

16. TPM feature will not be supported on machines pre-configured with FreeDOS  
In selected countries, machines pre-configured with Windows OS will be shipped with TPM disabled.

### Standard Features and Configurable Modules

#### **SERVICE AND SUPPORT**

**On-site Warranty:** One-year (1-1-1) limited warranty delivers, next business day service for parts and labor and includes free support 24 x 7. One-year onsite and labor are not available in all countries. Service offers terms up to 5 years by choosing an optional HP Care Pack. To choose the right level of service for your HP product, visit HP Care Pack Central: [www.hp.com/go/cpc](http://www.hp.com/go/cpc)

**NOTE 1:** Terms and conditions may vary by country. Certain restrictions and exclusions apply. Other warranty variations may be offered in your region.

**NOTE 2:** On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.

**NOTE 3:** Technical support applies only to HP-configured and third-party HP qualified hardware and software. 24 x 7 support may not be available in some countries.

---

### Technical Specifications - Graphics

#### GRAPHICS

Integrated AMD HD Graphics (Bristol Ridge & Raven Ridge)	
DisplayPort™	<ul style="list-style-type: none"> <li>• DP++</li> <li>• DisplayPort audio:               <ul style="list-style-type: none"> <li>○ Linear PCM, Dolby Digital (AC-3), Dolby® TrueHD, DTS Studio Sound™</li> <li>○ LPCM at sample rates: 32 kHz, 44.1 kHz, 48 kHz, 88.2 kHz, 96 kHz, 176.4 kHz, and 192 kHz, Bits per sample: 16, 20, and 24</li> <li>○ Supports up to 8 channels</li> </ul> </li> <li>• 4, 2, or 1-lane transmission</li> <li>• 5.4 Gbps (HBR2), 2.7 Gbps (HBR) , and 1.62 Gbps (RBR) link bit rates</li> <li>• DisplayPort Multi-Stream Transport (MST) for up to three independent video and audio streams on one DisplayPort connector. . The total number of supported displays is also limited by the bandwidth required by the attached DisplayPort capable displays. For example only one 3840 x2160 or 4096 x 2160 display can be connected to a DisplayPort output.</li> <li>• Supports HDCP2.1</li> <li>• Supports stereoscopic 3D gaming, Blu-ray 3D, and stereoscopic 3D video for 120-Hz frame sequential monitors</li> </ul>
Memory	Allocated at system startup and configurable using F10 setup with values of 128MB, 256MB, 512MB and 1024MB. Additional memory that is not in use by the host will be dynamically allocated and will vary depending on the total installed system memory.
Maximum Graphics Memory	Microsoft Windows 10:Variable*
Maximum Color Depth	32 bits/pixel, 8-bits per color component
Graphics/Video API Support	<p>AMD Eyefinity            AMD Eyefinity support for up to four displays when at least two displays are operating with DisplayPort 1.2 multi-streaming.</p> <p>Power Management</p> <ul style="list-style-type: none"> <li>• AMD PowerPlay™ power management technology               <ul style="list-style-type: none"> <li>○ Dynamic power gating for GPU, UVD, VCE, GFX, DCE, and Graphics Memory Controller (GMC)Dynamic refresh rate supported with digital panels that support this feature</li> </ul> </li> <li>• Frame Buffer Compression</li> </ul> <p>3D Acceleration Features            DirectX® 12 compliant, including full speed 32-bit floating point per component operations:</p> <ul style="list-style-type: none"> <li>• Shader Model 5 geometry and pixel support in a unified shader architecture               <ul style="list-style-type: none"> <li>○ Graphics Core Next (GCN) architecture</li> <li>○ Advanced shader instructions, including flexible flow control with CPU-level flexibility on branching</li> <li>○ Read/Write caching system, replacing texture cache with a unified read-write two-level cache</li> <li>○ Vertex, pixel, geometry, compute, domain, and hull shaders</li> <li>○ 32-bit and 64-bit floating point processing per component</li> <li>○ High performance dynamic branching and flow control</li> <li>○ Shader instruction store, using an advanced caching system</li> <li>○ Advanced shader design, with ultra-threading sequencer for high efficiency operations</li> <li>○ Advanced, high performance branching support, including static and dynamic branching</li> <li>○ High dynamic range rendering with floating point blending, texture filtering, and anti-aliasing support</li> <li>○ 16-bit and 32-bit floating point components for high dynamic range computations</li> <li>○ Full anti-aliasing on render surfaces up to and including 128-bit floating point formats</li> </ul> </li> <li>• Support for OpenCL™ 1.2, DirectCompute 11 and Microsoft C++ AMP</li> <li>• Support for OpenGL 4.1/4.1+</li> <li>• Motion Video Acceleration Features</li> </ul>

### Technical Specifications - Graphics

	<ul style="list-style-type: none"> <li>• Supports DVD, Blu-ray, and SDTV/HDTV content playback with low CPU usage</li> <li>• Supports stereoscopic 3D Blu-ray</li> <li>• Video compression engine:             <ul style="list-style-type: none"> <li>○ Dedicated hardware (VCE 2.0) assisted encoding of HD video streams to H.264 (main profile)</li> <li>○ Support H.264 SVC temporal scalability</li> <li>○ Real-time transcoding by encoding the output from UVD with reduction of CPU utilization and power consumption</li> </ul> </li> <li>• Motion video decode acceleration technology:             <ul style="list-style-type: none"> <li>○ Dedicated hardware (UVD) for H.264, MPEG4, VC-1, MVC, and MPEG2 decode:</li> <li>○ H.264 implementation based on the ISO/IEC 14496-10 specification</li> <li>○ MPEG6 implementation based on the ISO/IEC 14496-2 specification</li> <li>○ VC-1 implementation based on the SMPTE 421M specification</li> <li>○ MPEG2 implementation based on the ISO 13818-2 specification</li> <li>○ Multi View Coding (MVC) for Blu-ray 3D content</li> <li>○ WMV-9 implementation</li> <li>○ Real time high-definition and standard definition stream decode</li> <li>○ Real time dual high-definition stream decode</li> </ul> </li> </ul>
<b>Supported Display Resolutions and Refresh Rates</b>	
<b>Supported Display Resolutions and Refresh Rates</b>	640 x 480 @85Hz 720 x 400@70Hz 800 x 600@85Hz 1024 x 768@85Hz 1152 x 864@85Hz 1280 x 720@85Hz 1280 x 768@85Hz 1280 x 800@85Hz 1280 x 960@85Hz 1280 x 1024@85Hz 1366 x 768@60Hz 1440 x 900@60Hz 1600 x 900@85Hz 1680 x 1050@75Hz 1920 x 1080@60Hz 1920 x 1200@85Hz 1600 x 1200@85Hz 1920 x 1440@85Hz 2048 x 1536@75Hz 2560 x 1440@59.951Hz 2560 x 1600@60Hz 3840 x 2160@60Hz 4096 x 2160@60Hz

### Technical Specifications - Graphics

<b>VGA and DVI-A (analog) display modes</b>	
Resolution/ Depth (bpp) /Refresh Rates	640 x 480 @85Hz 720 x 400@70Hz 800 x 600@85Hz 1024 x 768@85Hz 1152 x 864@85Hz 1280 x 720@85Hz 1280 x 768@85Hz 1280 x 800@85Hz 1280 x 960@85Hz 1280 x 1024@85Hz 1366 x 768@60Hz 1440 x 900@60Hz 1600 x 900@85Hz 1680 x 1050@75Hz 1920 x 1080@60Hz 1920 x 1200@85Hz 1600 x 1200@85Hz 1920 x 1440@85Hz 2048 x 1536@75Hz 2560 x 1440@59.951Hz 2560 x 1600@60Hz 3840 x 2160@60Hz 4096 x 2160@60Hz
<b>NOTE:</b> The actual amount of maximum graphics memory can be less than the amounts listed above depending upon your computer's configuration.	
<b>NOTE:</b> Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP	

<b>NVIDIA® GeForce® GT730 1GB HDMI DVI PCIe x8 HDMI GFX</b>	Engine Clock	902 MHz
	Memory Clock	1250 MHz
	Memory Size(width)	1GB (64-bit)
	Memory Type	128Mx32 DDR5@2pcs
	Max. Resolution(HDMI)	4096x2160 @24Hz
	Max. Resolution(DP)	N/A
	Multi Display Support	2 Displays
	HDCP Compliance	Yes
	Rear I/O connectors(bracket)	DVI-I + HDMI (VGA, via DVI-VGA adapter)
	Cooling(active/passive)	Active fan-sink(Active cooling with dynamic speed)
	Total power consumption(W)	<35W
	PCB form-factor with bracket	PCIex8 LP(half height)PCB with FH bracket

### Technical Specifications - Graphics

<b>NVIDIA® GeForce® GT730 2GB DP DVI PCIe x8 GFX</b>	Engine Clock	902 MHz
	Memory Clock	1250Mhz
	Memory Size(width)	2GB (64-bit)
	Memory Type	256Mx32 DDR5 @ 2pcs
	Max. Resolution(HDMI)	2560x1600 @60Hz
	Max. Resolution(DP)	4096x2160 @60Hz
	Multi Display Support	2 Displays
	HDCP Compliance	Yes
	Rear I/O connectors(bracket)	DVI-I+DP
	Cooling(active/passive)	Active fan-sink(Active cooling with dynamic speed)
	Total power consumption(W)	<35W
	PCB form-factor with bracket	PClex8 LP(half height)PCB with FH bracket

<b>AMD® Radeon™ RX550 4GB FH PCIe x16</b>	Engine Clock	1183MHz
	Memory Clock	7 Gbps
	Memory Size(width)	4GB(128-bit)
	Memory Type	GDDR5
	Max. Resolution(HDMI)	4096x2160 @ 60Hz
	Max. Resolution(DP)	5120x2880 @ 60Hz
	Multi Display Support	3 displays
	HDCP Compliance	yes
	Rear I/O connectors(bracket)	HDMI, DPx2
	Cooling(active/passive)	Active fan-sink(Active cooling with dynamic speed)
	Total power consumption(W)	<50W
	PCB form-factor with bracket	ATX (Full height) PCB with ATX single slot bracket

### Technical Specifications - Storage

#### STORAGE<sup>1</sup>

<b>2 TB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive</b>	<b>Capacity</b>	2 TB
	<b>Rotational Speed</b>	7,200 rpm
	<b>Interface</b>	SATA 6.0 Gb/s
	<b>Cache, Multi-segmented (MB)</b>	64 MB
	<b>Height</b>	1.028 in/26.11 mm
	<b>Width</b>	4.0 in/101.6 mm
	<b>Depth</b>	5.787 in/146.99 mm
	<b>Weight</b>	1.38 lb/626 g
	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)

<b>1 TB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive</b>	<b>Capacity</b>	1 TB
	<b>Rotational Speed</b>	7,200 rpm
	<b>Interface</b>	SATA 6.0 Gb/s
	<b>Buffer Size</b>	32 MB
	<b>Logical Blocks</b>	1,953,525,168
	<b>Seek Time (typical reads, includes controller overhead, including settling)</b>	Single Track: 2.0 ms Average: 11 ms Full-Stroke: 21 ms
	<b>Height</b>	1 in/2.54 cm
	<b>Width (nominal)</b>	Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm
	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)

<b>500 GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive</b>	<b>Capacity</b>	500 GB
	<b>Rotational Speed</b>	7,200 rpm
	<b>Drive Type</b>	Serial ATA 3.0 (6.0 Gb/s)
	<b>Interface</b>	32 MB
	<b>Buffer Size</b>	976,773,168
	<b>Seek Time</b>	Single Track: 2.0 ms Average: 11 ms Full-Stroke: 21 ms
	<b>Height (nominal)</b>	1 in/2.54 cm
	<b>Width</b>	Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm
	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)



### Technical Specifications - Storage

<b>HP 9.5mm Desktop G2 Slim DVD Writer Drive</b>	<b>Height</b>	9.5 mm height
	<b>Orientation</b>	Either horizontal or vertical
	<b>Interface type</b>	SATA/ATAPI
	<b>Disc recording capacity</b>	Up to 8.5 GB DL or 4.7 GB standard
	<b>Dimensions (W x H x D)</b>	5.04 x 0.37 x 5.0 in (128 x 9.5 x 127 mm) without bezel
	<b>Weight (max)</b>	0.31 lb (140 g)
	<b>Read Speeds</b>	DVD-R DL - Up to 6X DVD+R - Up to 8X DVD+RW - Up to 8X DVD+R DL - Up to 6X DVD-R - Up to 8X DVD-RW - Up to 6X CD-R - Up to 24X CD-RW - Up to 10X DVD-RW, DVD+RW - Up to 8X DVD-R DL, DVD+R DL - Up to 8X DVD+R, DVD-R - Up to 8X DVD-ROM DL, DVD-ROM - Up to 8X CD-ROM, CD-R - Up to 24X CD-RW - Up to 24X
	<b>Access time (typical reads, including settling)</b>	Random DVD-ROM: 170 ms (typical), CD-ROM: 170 ms (typical) Full Stroke DVD-ROM: 320 ms (typical), CD-ROM: 320 ms (typical) Stop Time 6 seconds (typical)
	<b>Power</b>	Source Slimline SATA DC power receptacle DC Power Requirement 5 VDC ± 5%-100 mV ripple p-p DC Current 5 VDC (< 1000 mA typical, 1600 mA maximum)
	<b>Environmental conditions (operating - non-condensing)</b>	Temperature 41° to 122° F (5° to 50° C) Relative Humidity 10% to 80% Maximum Wet Bulb Temperature 84° F (29° C)

<b>HP 9.5mm Desktop G2 Slim DVD-ROM Drive</b>	<b>Height</b>	9.5 mm height
	<b>Orientation</b>	Either horizontal or vertical
	<b>Interface type</b>	SATA/ATAPI
	<b>Dimensions (W x H x D)</b>	5.04 x 0.37 x 5.0 in (128 x 9.5 x 127 mm) without bezel
	<b>Weight (max)</b>	Up to 0.31 lb (140g) without bezel
	<b>Read Speeds</b>	DVD-R DL - Up to 6X DVD+R - Up to 8X DVD+RW - Up to 8X DVD+R DL - Up to 6X DVD-R - Up to 8X DVD-RW - Up to 6X CD-R - Up to 24X CD-RW - Up to 10X DVD-RW, DVD+RW - Up to 8X DVD-R DL, DVD+R DL - Up to 8X DVD+R, DVD-R - Up to 8X DVD-ROM DL, DVD-ROM - Up to 8X CD-ROM, CD-R - Up to 24X CD-RW - Up to 24X

### Technical Specifications - Storage

<b>Access time (typical reads, including settling)</b>	Random: DVD-ROM: 170 ms (typical), CD-ROM: 170 ms (typical) Full stroke: DVD-ROM: 320 ms (typical), CD-ROM: 320 ms (typical)
<b>Power</b>	Source Slimline SATA DC power receptacle DC Power Requirement 5 VDC $\pm$ 5%-100 mV ripple p-p DC Current 5 VDC (< 1000 mA typical, 1600 mA maximum)
<b>Environmental conditions (operating - non-condensing)</b>	Temperature 41° to 122° F (5° to 50° C) Relative Humidity 10% to 80% Maximum Wet Bulb Temperature 84° F (29° C)

<b>128 GB M.2 2280 PCIe NVMe SSD</b>	<b>Drive Weight</b>	< 10g
	<b>Capacity</b>	128GB
	<b>Height</b>	2.38mm
	<b>Length</b>	80mm
	<b>Width</b>	22mm
	<b>Interface</b>	PCIe Gen3
	<b>Maximum Sequential Read</b>	Up to 1400MB/s
	<b>Maximum Sequential Write</b>	Up to 395MB/s
	<b>Logical Blocks</b>	250,069,680
	<b>Operating Temperature</b>	0° to 70°C (32° to 158°F) [ambient temp]
<b>Features</b>	APST; ASPM L1.2; NVME spec 1.2	

**NOTE:** For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36 GB (for Windows 10) of system disk is reserved for the system recovery software.

### Technical Specifications - Storage

<b>256 GB M.2 2280 PCIe NVMe SSD</b>	<b>Drive Weight</b>	< 10g
	<b>Capacity</b>	256 GB
	<b>Height</b>	2.38mm
	<b>Length</b>	80mm
	<b>Width</b>	22mm
	<b>Interface</b>	PCIe Gen3
	<b>Maximum Sequential Read</b>	Up to 1600MB/s
	<b>Maximum Sequential Write</b>	Up to 780MB/s
	<b>Logical Blocks</b>	500,118,192
	<b>Operating Temperature</b>	0° to 70°C (32° to 158°F) [ambient temp]
	<b>Features</b>	APST; ASPM L1.2; NVMe spec 1.2

**NOTE:** For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36 GB (for Windows 10) of system disk is reserved for the system recovery software.

<b>512 GB M.2 2280 PCIe NVMe SSD</b>	<b>Drive Weight</b>	< 10g
	<b>Capacity</b>	512 GB
	<b>Height</b>	2.38mm
	<b>Length</b>	80mm
	<b>Width</b>	22mm
	<b>Interface</b>	PCIe Gen3
	<b>Maximum Sequential Read</b>	Up to 1600MB/s
	<b>Maximum Sequential Write</b>	Up to 860MB/s
	<b>Logical Blocks</b>	1,000,215,216
	<b>Operating Temperature</b>	0° to 70°C (32° to 158°F) [ambient temp]
	<b>Features</b>	APST; ASPM L1.2; NVMe spec 1.2

**NOTE:** For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36 GB (for Windows 10) of system disk is reserved for the system recovery software.

### Technical Specifications - Storage

<b>128 GB 2.5in SATA Three Layer Cell SSD</b>	<b>Drive Weight</b>	<50g
	<b>Capacity</b>	128GB
	<b>Height</b>	7mm
	<b>Length</b>	100.45mm
	<b>Width</b>	69.85mm
	<b>Interface</b>	SATA 3.0 (6Gb/s)
	<b>Performance</b>	Up to Random Read/Write = 70K/40K IOPS
	<b>Maximum Sequential Read</b>	Up to 530MB/s
	<b>Maximum Sequential Write</b>	Up to 380MB/s
	<b>Logical Blocks</b>	250,069,680
	<b>Operating Temperature</b>	0° to 70°C (32° to 158°F) [ambient temp]
<b>Features</b>	DIPM; TRIM	

**NOTE:** For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36 GB (for Windows 10) of system disk is reserved for the system recovery software.

<b>256 GB 2.5in SATA Three Layer Cell SSD</b>	<b>Drive Weight</b>	<62g
	<b>Capacity</b>	256GB
	<b>Height</b>	7mm
	<b>Length</b>	100.45mm
	<b>Width</b>	69.85mm
	<b>Interface</b>	SATA 3.0 (6Gb/s)
	<b>Performance</b>	Up to Random Read/Write = 55K/68K IOPS
	<b>Maximum Sequential Read</b>	Up to 530MB/s
	<b>Maximum Sequential Write</b>	Up to 450MB/s
	<b>Logical Blocks</b>	500,118,192
	<b>Operating Temperature</b>	0° to 70°C (32° to 158°F) [ambient temp]
<b>Features</b>	DIPM; TRIM	

**NOTE:** For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36 GB (for Windows 10) of system disk is reserved for the system recovery software.

### Technical Specifications - Audio

#### HIGH DEFINITION AUDIO

<b>Type</b>	Integrated
<b>HD Stereo Codec</b>	Realtek ALC3601
<b>Audio I/O Ports</b>	Front Combo jack, Headphone/ Microphone(Headphone-out 0.5 Ohm Output Impedance, expects at least a 32 ohm load, Microphone-in 150-K ohm Input Impedance)  Rear Line-out(190 ohms Output Impedance, expects at least a 10-K ohm load). Mic-in( 150-K ohm Input Impedance) Line-in(Input the audio signal to system via the loopback cable)  When plug in all rear side jacks, can switch the function to 5.1 ch via audio GUI.
<b>Internal Speaker Amplifier</b>	Codec embeded amp for supporting 2W mono speaker.
<b>Multi-streaming Capable</b>	Multi-streaming can be enabled in the Realtek control panel to allow independent audio streams to be sent to/from the front and rear jacks.
<b>Sampling</b>	Independent sampling rates for DAC's and ADC's; supports resolutions from 16 to 24-bit, 44.1K/ 48 K/96K / 192K Hz for DAC and 16 bit, 44.1K/ 48K/ 96K/ 192K Hz for ADC
<b>Wavetable Syntheses</b>	Yes
<b>Analog Audio</b>	Yes
<b># of Channels on Line-Out</b>	Stereo(Left channel/ Right channel)
<b>Internal Speaker</b>	Yes
<b>External Speaker Jack</b>	2W class D mono amplifier for the internal speaker only. External speakers must be powered externally.

### Technical Specifications - Networking

#### NETWORKING

<b>Integrated 10/100/1000 NIC</b>	<b>Ethernet Features</b>	10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) 1000 Mbit/s operation (1000BASE-T; IEEE 802.3ab; IEEE 802.3 clauses 40) Auto-Negotiation (Automatic Speed Selection) Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s
	<b>Power Management</b>	ACPI compliant – multiple power modes Situation-sensitive features reduce power consumption Advanced link down power saving for reducing link down power consumption
	<b>Performance Features</b>	TCP/IP/UDP Checksum Offload (configurable) Protocol Offload (ARP & NS) Large send offload and Giant send offload Receiving Side Scaling Jumbo Frame 9K
	<b>Manageability</b>	Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only) PXE 2.1 Remote Boot Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30)) Comprehensive diagnostic and configuration software suite Virtual Cable Doctor for Ethernet cable status
	<b>Interface</b>	PCIe + SMBus
	<b>NIC Device Driver Name</b>	PCIe GBE Ethernet Family Controller

### Technical Specifications - Networking

#### Realtek 802.11ac (1x1) WiFi and Bluetooth® 4.2 Combo<sup>1</sup>

Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac
Interoperability	Wi-Fi certified
Frequency Bands	802.11b/g/n <ul style="list-style-type: none"> <li>• 2.402 – 2.482 GHz</li> </ul> 802.11a/n <ul style="list-style-type: none"> <li>• 4.9 – 4.95 GHz (Japan)</li> <li>• 5.15 – 5.25 GHz</li> <li>• 5.25 – 5.35 GHz</li> <li>• 5.47 – 5.725 GHz</li> <li>• 5.825 – 5.850 GHz</li> </ul>
Data Rates	<ul style="list-style-type: none"> <li>• 802.11b: 1, 2, 5.5, 11 Mbps</li> <li>• 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li> <li>• 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li> <li>• 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)</li> <li>• 802.11ac : MCS0 ~ MCS9, (1SS, and 2SS) (20MHz, 40MHz, and 80MHz)</li> </ul>
Modulation	Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM
Security	<ul style="list-style-type: none"> <li>• IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only</li> <li>• AES-CCMP: 128 bit in hardware</li> <li>• 802.1x authentication</li> <li>• WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.</li> <li>• WPA2 certification</li> <li>• IEEE 802.11i</li> <li>• Cisco Certified Extensions, all versions through CCX4 and CCX Lite</li> <li>• WAPI</li> </ul>
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power	<ul style="list-style-type: none"> <li>• 802.11b : +14dBm minimum</li> <li>• 802.11g : +12dBm minimum</li> <li>• 802.11a : +12dBm minimum</li> <li>• 802.11n HT20(2.4GHz) : +12dBm minimum</li> <li>• 802.11n HT40(2.4GHz) : +12dBm minimum</li> <li>• 802.11n HT20(5GHz) : +10dBm minimum</li> <li>• 802.11n HT40(5GHz) : +10dBm minimum</li> <li>• 802.11ac VHT80(5GHz) : +10dBm minimum</li> </ul>
Power Consumption	<ul style="list-style-type: none"> <li>• Transmit mode 2.0 W</li> <li>• Receive mode 1.6 W</li> <li>• Idle mode (PSP) 180 mW (WLAN Associated)</li> <li>• Idle mode 50 mW (WLAN unassociated)</li> <li>• Connected Standby 10mW</li> <li>• Radio disabled 8 mW</li> </ul>

### Technical Specifications - Networking

Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode	
Receiver Sensitivity	802.11b, 1Mbps : -93.5dBm maximum 802.11b, 11Mbps : -84dBm maximum 802.11a/g, 6Mbps : -86dBm maximum 802.11a/g, 54Mbps : -72dBm maximum 802.11n, MCS07 : -67dBm maximum 802.11n, MCS15 : -64dBm maximum 802.11ac, MCS0 : -84dBm maximum 802.11ac, MCS9 : -59dBm maximum	
Antenna type	High efficiency antenna. One embedded dual band 2.4/5 GHz antenna is provided to the card to support WLAN communications and Bluetooth communications	
Form Factors	PCI-Express M.2 MiniCard	
Dimensions	Type 2230 : 2.3 x 22.0 x 30.0 mm	
Weight	Type 2230 : 2.8g	
Operating Voltage	3.3v +/- 9%	
Temperature	Operating:	14° to 158° F (-10° to 70° C)
	Non-operating:	-40° to 176° F (-40° to 80° C)
Humidity	Operating:	10% to 90% (non-condensing)
	Non-operating:	5% to 95% (non-condensing)
Altitude	Operating:	0 to 10,000 ft (3,048 m)
	Non-operating:	0 to 50,000 ft (15,240 m)
LED Activity	LED Amber – Radio OFF; LED White – Radio ON	
<b>HP Integrated Module with Bluetooth 4.0/4.1/4.2 Wireless Technology</b>		
Bluetooth® Specification	4.0/4.1/4.2 Compliant	
Frequency Band	2402 to 2480 MHz	
Number of Available Channels	Legacy : 0~79 (1 MHz/CH) BLE : 0~39 (2 MHz/CH)	
Data Rates and Throughput	Legacy : 3 Mbps data rate; throughput up to 2.17 Mbps	
	BLE : 1 Mbps data rate; throughput up to 0.2 Mbps	
	Legacy : Synchronous Connection Oriented links up to 3, 64 kbps, voice channels	
	Legacy : Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)	
Transmit Power	The Bluetooth® component shall operate as a Class II Bluetooth® device with a maximum transmit power of + 4 dBm for BR and EDR.	

### Receiver Sensitivity Legacy



### Technical Specifications - Networking

Power Consumption	Peak (Tx) 330 mW Peak (Rx) 230 mW Selective Suspend 17 mW
Range	Legacy : 0~79 (1 MHz/CH) BLE : 0~39 (2 MHz/CH)
Electrical Interface	USB 2.0 compliant
Bluetooth® Software Supported Link Topology	Microsoft Windows Bluetooth® Software
Power Management Certifications	ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark
Bluetooth® Profiles Supported	FCC (47 CFR) Part 15C, Section 15.247 & 15.249
Power Management Certifications	Microsoft Windows ACPI, and USB Bus Support
Certifications Bluetooth® Profiles Supported	BT4.1-ESR 5/6/7 Compliance LE Link Layer Ping LE Dual Mode LE Link Layer LE Low Duty Cycle Directed Advertising LE L2CAP Connection Oriented Channels Train Nudging & Interlaced Scan BT4.2 ESR08 Compliance LE Secure Connection- Basic/Full LE Privacy 1.2 –Link Layer Privacy LE Privacy 1.2 –Extended Scanner Filter Policies LE Data Packet Length Extension FAX Profile (FAX) Basic Imaging Profile (BIP)2 Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)

1. Wireless access point and Internet service is required. Availability of public wireless access point is limited. The specifications for the 802.11ac WLAN are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11ac WLAN devices

### Technical Specifications - Power

#### POWER

<b>Operating Voltage Range</b>	90 – 264 VAC
<b>Rated Voltage Range</b>	100-240V AC
<b>Rated Line Frequency</b>	50/60 HZ
<b>Operating Line Frequency</b>	47 – 63 Hz
<b>Rated Input Current</b>	180W : <2.3A; 310W: <4A
<b>Rated Input Current with Energy Efficient* Power Supply</b>	180W active PFC 87/90/87% efficient at 20/50/100% load (115V) 88/91/88% efficient at 20/50/100% load (230V); 310W active PFC 87/90/87% efficient at 20/50/100% load (115V) 88/91/88% efficient at 20/50/100% load (230V)
<b>DC Output</b>	+12.1V
<b>Current Leakage (NFPA 99: 2102)</b>	Less than 500 microamps of leakage current at 120 Vac with the ground wire disconnected, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1. Less than 100 microamps of leakage current at 120 Vac with the ground wire intact with normal polarity, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1.
<b>Power Supply Fan</b>	70*25mm (linear type)

### Technical Specifications – Dimensions and weight

#### DIMENSIONS & WEIGHT

<b>Chassis (W x H x D)</b>	6.69 x 13.3 x 10.79 in (170 x 338 x 274 mm)
<b>System Volume</b>	960.06cu in 15.74L
<b>System Weight*</b>	11.9 lbs / 5.4 kg
<b>Tower Stand (H x W x D)</b>	13.42 x 6.69 x 10.92 in (340.8 x 170 x 277.5 mm)
<b>Packaged (H x W x D)</b>	11.46 x 15.35 x 19.65 in 291 x 390 x 499 mm
<b>Shipping Weight</b>	17.64lb / 8 kg
<b>Palletization Profile</b>	6 units per layer 7 layer max 42 per pallet Footprint -85.31x39.37x47.24 in ( 2167 x 1000 x1200 mm)

#### UNIT ENVIRONMENT AND OPERATING CONDITIONS<sup>9</sup>

- Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range.
- Leave a 10.2 cm (4 in) clearance on all vented sides of the computer to permit the required airflow.
- Never restrict airflow into the computer by blocking any vents or air intakes.
- Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air.
- Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.
- If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.

<b>Temperature Range</b>	Operating: 50° to 95° F (10° to 35° C)* Non-operating: -22° to 149° F (-30° to 65° C)
<b>Relative Humidity</b>	Operating: 15% to 90% (non-condensing at ambient) Non-operating: 15% to 90% (non-condensing at ambient)
<b>Maximum Altitude (unpressurized)</b>	Operating: 5000m Non-operating: 50000ft (15240 m)

**NOTE:** Operating temperature is de-rated 1.0 deg C per 300 m (1000 ft) to 3000 m (10,000 ft) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/Hr. The upper limit may be limited by the type and number of options installed.

#### COUNTRY OF ORIGIN

China

### Technical Specifications – Miscellaneous Features

#### **ADDITIONAL FEATURES**

	<b>Description</b>
--	--------------------

<b>SMART Technology (Self-Monitoring, Analysis and Reporting Technology)</b>	Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted
--	---

### Technical Specifications – Environmental

#### ENVIRONMENTAL & INDUSTRY

**Eco-Label Certifications & declarations** This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- IT ECO declaration
- US ENERGY STAR®
- EPEAT® Gold registered in the United States. See <http://www.epeat.net> for registration status in your country\*.

**System Configuration** The configuration used for the Energy Consumption and Declared Noise Emissions data for the Ultra-slim Desktop model is based on a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

#### Energy Consumption (in accordance with US ENERGY STAR® test method)

	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation (Short idle)	19.99	20.21	20.17
Normal Operation (Long idle)	16.54	17.23	16.53
Sleep	0.75	0.75	0.72
Off	0.32	0.35	0.32

**NOTE:** Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

#### Heat Dissipation\*

	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation (Short idle)	68.18	68.92	68.77
Normal Operation (Long idle)	56.39	58.76	56.37
Sleep	2.55	2.56	2.44
Off	1.1	1.2	1.1

**NOTE:** Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

#### Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

	Sound Power (L <sub>WAd</sub> , bels)	Sound Pressure (L <sub>pAm</sub> , decibels)
Typically Configured – Idle	3.5	25.4
Fixed Disk – Random writes	3.5	25.6

### Technical Specifications – Environmental

#### Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:  
Mercury greater than 1ppm by weight  
Cadmium greater than 20ppm by weight

Battery size: CR2032 (coin cell)

Battery type: Lithium

#### Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the <gold> level, see [www.epeat.net](http://www.epeat.net) \*
- Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043.
- This product contains 0% post-consumer recycled plastic (by wt.)
- This product is 95.1% recycle-able when properly disposed of at end of life.

#### Packaging Materials

**External:** PAPER/Corrugated

**Internal:** PLASTIC/EPS (Expanded Polyethylene)

PLASTIC/Polyethylene low density

The Plastic packaging material is made from 10.5% recycled content.

The corrugated paper packaging materials contains at least 43.8% recycled content.

#### Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at <http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf>):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBEBs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

### Technical Specifications – Environmental

#### Packaging Usage

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

#### End-of-life Management and Recycling

HP Inc. offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

#### HP, Inc. Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www8.hp.com/us/en/hp-information/environment/ecolabels.html>

ISO 14001 certifications:

<http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04755842>

and

<http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf>

\*EPEAT® registered where applicable. EPEAT registration varies by country. See [www.epeat.net](http://www.epeat.net) for registration status by country.

Options and Accessories (sold separately and availability may vary by country)

### AFTER MARKET OPTIONS

Type	Description	Part #
<b>Memory</b>	HP 4GB DDR4-2666 DIMM	3TK85AA
	HP 8GB DDR4-2666 DIMM	3TK87AA
	HP 16GB DDR4-2666 DIMM	3TK83AA
<b>Storage</b>	HP 500GB SATA 6.0Gb/s Hard Drive	QK554AA
	HP 1TB 7200rpm SATA 6Gbps Hard Drive	QK555AA
	HP Turbo Drive Gen2 256GB M.2 SSD Drive	1CA51AA
	HP 256GB SATA TLC Non-SED Solid State Drive	P1N68AA
	HP 9.5mm G3 8/6/4 SFF G4 400 SFF/MT DVD Writer	1CA53AA
<b>Graphics</b>	NVIDIA GT 730 2GB DP Card	Z9H51AA
	AMD Radeon R7 430 Card	1MX32AA
<b>Security</b>	HP Business PC Security Lock V2 Kit	N3R93AA
	HP Keyed Cable Lock 10mm kit	T1A62AA
<b>Adapters</b>	HP PCIe x1 Parallel Port Card	N1M40AA
	HP HDMI Standard Cable Kit	T6F94AA
	HP USB to Serial Port Adapter	J7B60AA
<b>Networking</b>	Intel Ethernet I210-T1 GbE NIC Card	E0X95AA
<b>Input</b>	HP USB Mouse	QY777AA
	HP USB Hardened Mouse	P1N77AA
	HP USB Keyboard	QY776AA
	HP PS/2 Business Slim Keyboard	N3R86AA
	HP USB Business Slim Keyboard	N3R87AA
	HP Conferencing Keyboard	K8P74AA
	HP USB Antimicrobial Slim Keyboard and Mouse	Z9H50AA
<b>Others</b>	HP Business Headset v2	T4E61AA



### Summary of Changes

Date of change:	Version History:		Description of change:
March 15, 2018	V1 to V2	Update	Specs updated, Environmental table added
April 30, 2018	V2 to V3	Update	Processors
May 3, 2018	V3 to V4	Update	Graphics Section
May 7, 2018	V4 to V5	Update	GT730 1GB graphics card
May 30, 2018	V5 to V6	Update	Processors
August 16, 2018	V6 to V7	Update	Call outs image refreshed Call out added and whole section re-arranged Discrete graphic and memory cards refreshed Port/Slots section refreshed Certification section removed Graphics section updated Disclaimer note added to Environmental and industry section
August 21, 2018	V7 to V8	Update	Dimensions and weight / weight and dimensions updated
September 12, 2018	V8 to V9	Update	AMD Ryzen™ 3 PRO 2200G and 5 PRO 2400G added to processors section and non PRO versions removed.
September 14, 2018	V9 to V10	Update	Previous update reversed
October 17, 2018	V10 to V11	Update	Audio Line out and Audio Link in switched, pages 2 and 8
November 5, 2018	V11 to V12	Update	Note added for Security and Protection
February 21, 2019	V12 to V13	Added	128 GB M.2 2280 PCIe NVMe SSD 256 GB M.2 2280 PCIe NVMe SSD 512 GB M.2 2280 PCIe NVMe SSD and AMD Ryzen7 PRO 2700 Processor
April 10, 2019	V13 to V14	Change	Addition to Not shown call outs page 2 and processors section corrected
May 14, 2019	V14 to V15	Change	APU AMD PRO A12-9800 added
May 16, 2019	V15 to V16	Change	HP Recovery Manager removed
June 26, 2019	V16 to V17	Removed	Odd Playback and TV turners App stores and Content Purchasing PBR Priceline HP ePrint and it's disclaimer; from software section
October 3, 2019	V17 to V18	Update	Headers arrangement and Miscellaneous Features added
April 23, 2020	V18 to V19	Update	UNIT ENVIRONMENT AND OPERATING CONDITIONS table added

Copyright © 2020 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

AMD and Radeon are trademarks of Advanced Micro Devices, Inc. Bluetooth is a trademark of its proprietor and used by HP Inc. under license. USB-C™ are trademarks of USB Implementers Forum. ENERGY STAR is a registered trademark of the U.S. Environmental Protection Agency. All other trademarks are the property of their respective owners.